

ACOUSTIC LIGHTING

INSTRUCTIONS

For Assembling and Installing
Pour l'assemblage et L'installation



Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM



CONTENTS

NORTH AMERICA

					REMOTE DRIVER		CONCEALED DRIVER		ON-BOARD DRIVER
CODE	SUSPENSION POINTS POINTS DE SUSPENSION	CANOPY INFORMATION INFO SUR PAVILLONS	CEILING MOUNT SUPPORT PLAFOND	ADDITIONAL INFO INFORMATION ADDITIONELLE	DRIVER SCHEMATICS BLOC D'ALIMENTATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION	DRIVER SCHEMATICS BLOC D'ALIMENTATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION
VE	1	16, 17, 18	19	35	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
VER	2	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
MA	3	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
SI	4	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
BC	5	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
LN	6, 7	16, 17, 18	19	-	-	-	-	28, 29, 30, 31	27
BL	8	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
DA	9	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
AC	10	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
HH	11	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
VEC	12	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
IL	13	16, 17, 18	19	-	20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
WPD	14	16, 17, 18	19		20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27
WPU	15	16, 17, 18	19		20, 21, 22	23, 24, 25, 26	20, 21, 22	28, 29, 30, 31	27

GLOBAL

					REMOTE DRIVER		CONCEALED DRIVER		ON-BOARD DRIVER
CODE	SUSPENSION POINTS POINTS DE SUSPENSION	CANOPY INFORMATION BOITIER ELECTRIQUE	CEILING MOUNT SUPPORT PLAFOND	ADDITIONAL INFO INFORMATION ADDITIONELLE	DRIVER SCHEMATICS BLOC D'ALIMENTATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION	DRIVER SCHEMATICS BLOC D'ALIMENTATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION	INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION
VE	1	16, 17, 18	19	35	20	32, 33	20	28, 29	34
VER	2	16, 17, 18	19	-	20	32, 33	20	28, 29	34
MA	3	16, 17, 18	19	-	20	32, 33	20	28, 29	34
SI	4	16, 17, 18	19	-	20	32, 33	20	28, 29	34
BC	5	16, 17, 18	19	-	20	32, 33	20	28, 29	34
LN	6, 7	16, 17, 18	19	-	-	-	-	-	34
BL	8	16, 17, 18	19	-	20	32, 33	20	28, 29	34
DA	9	16, 17, 18	19	-	20	32, 33	20	28, 29	34
AC	10	16, 17, 18	19	-	20	32, 33	20	28, 29	34
HH	11	16, 17, 18	19	-	20	32, 33	20	28, 29	34
VEC	12	16, 17, 18	19	-	20	32, 33	20	28, 29	34
IL	13	16, 17, 18	19	-	20	32, 33	20	28, 29	34
WPD	14	16, 17, 18	19		20	32, 33	20	28, 29	34
WPU	15	16, 17, 18	19		20	32, 33	20	28, 29	34


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0




LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM

TOP VIEWS


SMALL

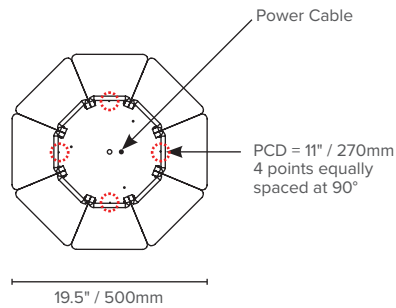

MEDIUM

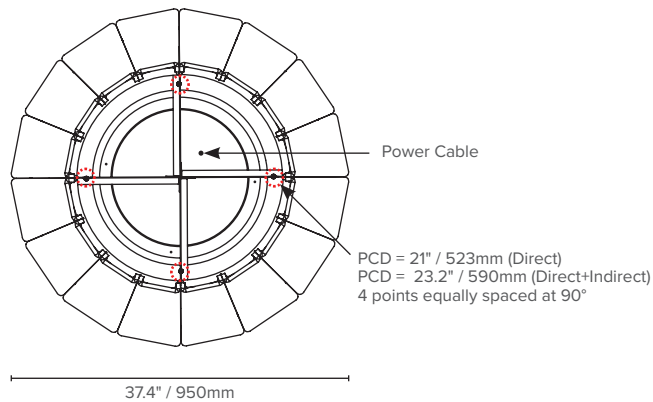


LARGE

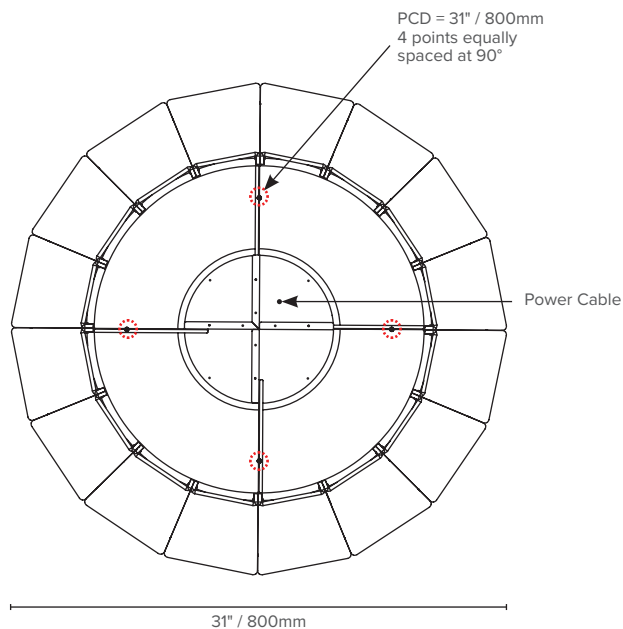


Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxbox-Acoustic-Lighting-Install-Instructions-v4.0

TOP VIEWS


SMALL

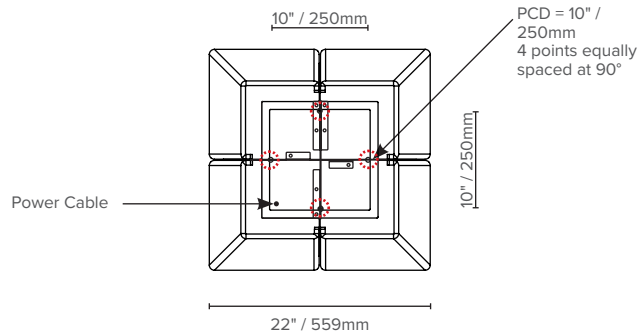

MEDIUM

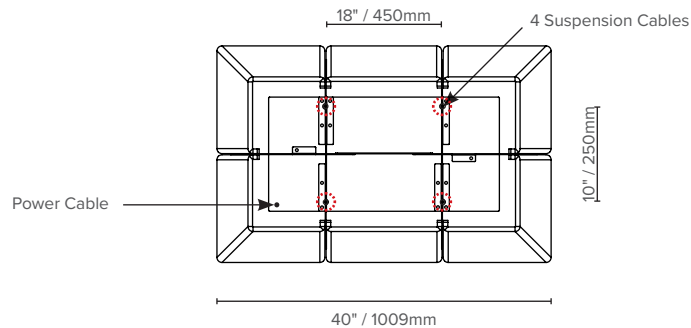


LARGE

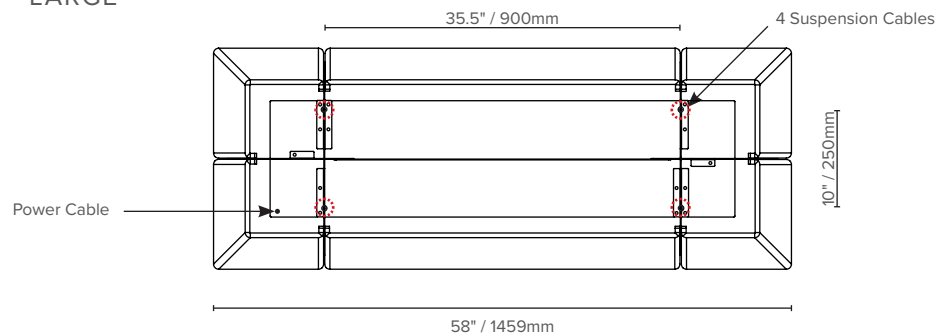


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

TOP VIEWS


MEDIUM

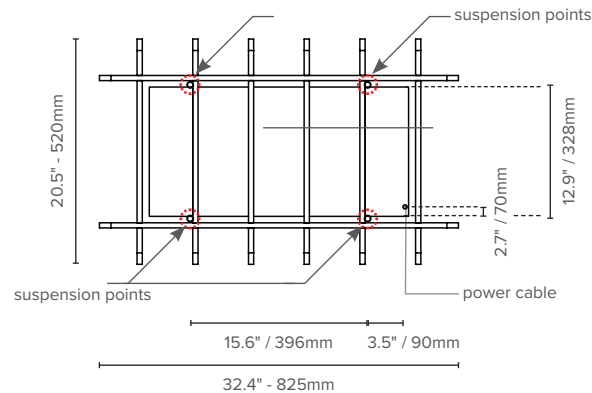


LARGE

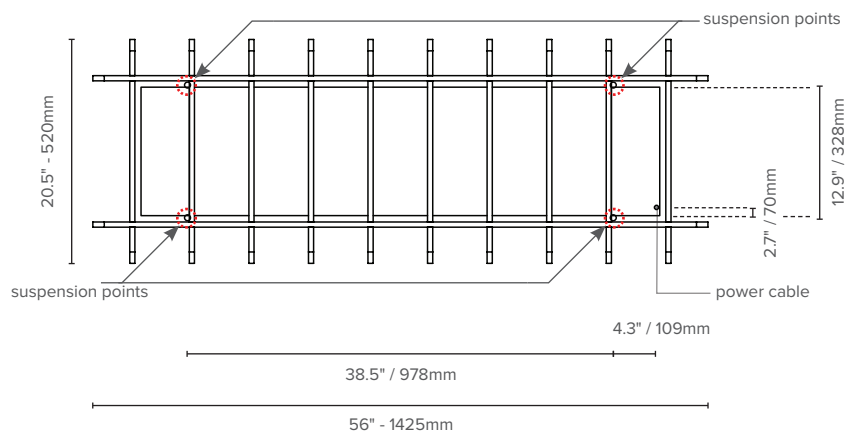


SMALL

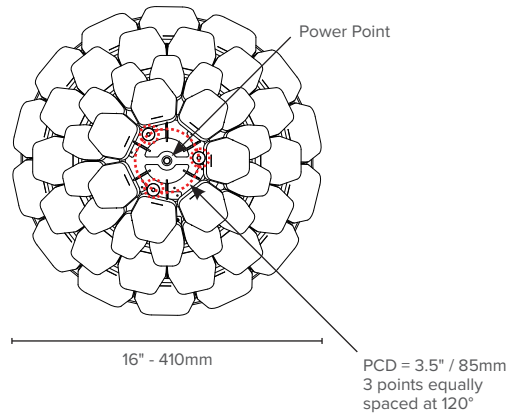

MEDIUM

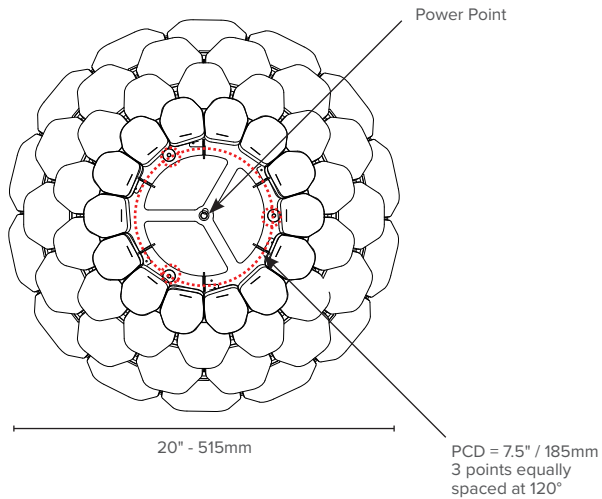


LARGE

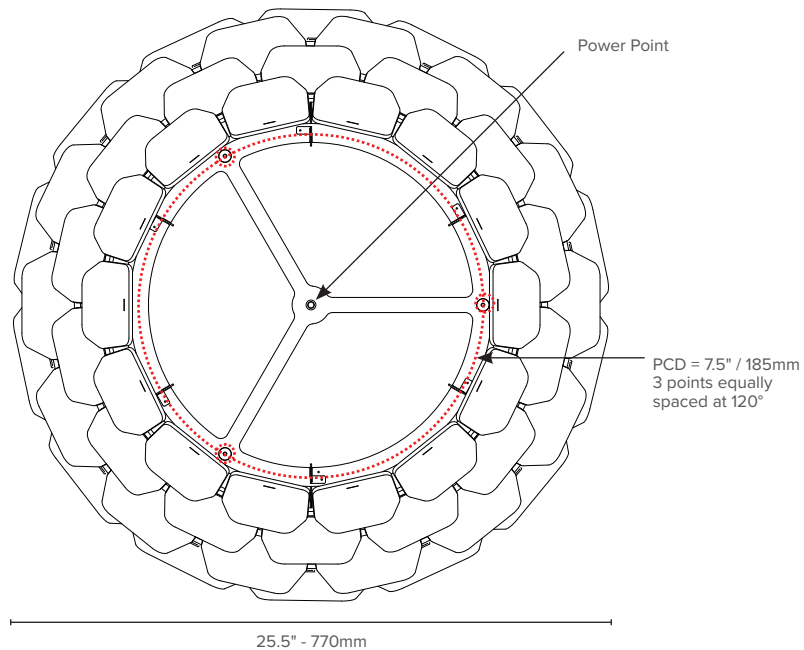


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


SMALL

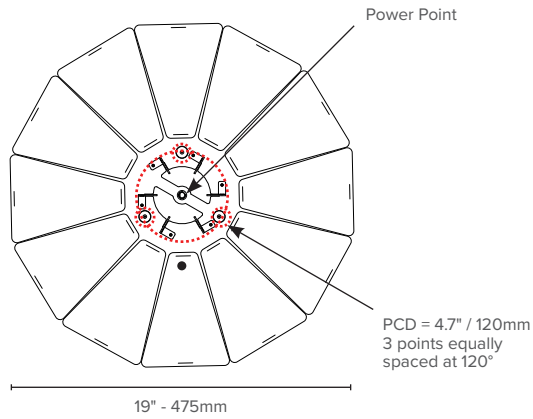

MEDIUM

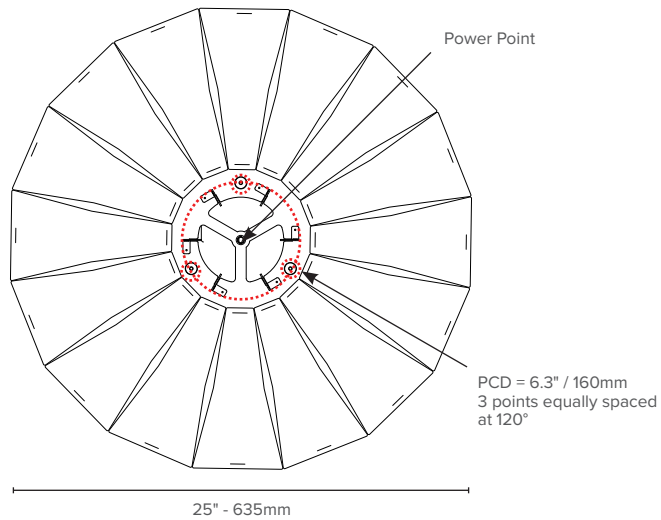

LARGE

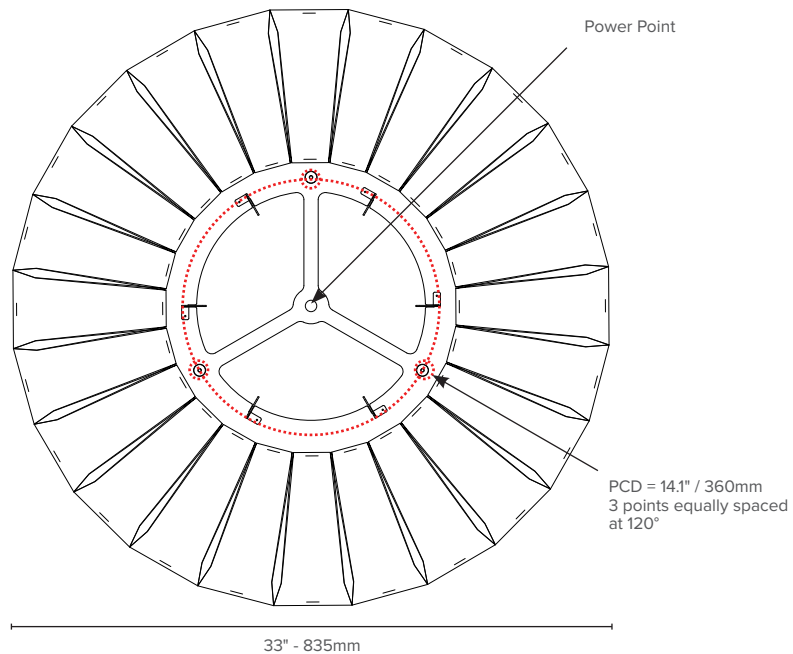

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0



SUSPENSION POINTS

LINEA

PRODUCT CONFIGURATION

Product Code	Overall Length (ft-in)	Overall Length (in)	Overall Lengths (mm)	Configuration	Number of fittings	Suspension Points
2	2ft-0in	24	620	2S	1	2
3	2ft-11in	35	900	3S	1	2
4	3ft-10in	46	1180	4S	1	2
5	4ft-9in	57	1460	5S	1	2
6	5ft-9in	69	1741	6S	1	2
7	6ft-8in	80	2021	7S	1	2
8	7ft-7in	91	2301	8S	1	2
9	8ft-6in	102	2600	5P - 4E	2	4
10	9ft-7in	115	2920	5P - 5E	2	4
11	10ft-4in	124	3161	6P - 5E	2	4
12	11ft-4in	136	3442	6P - 6E	2	4
13	12ft-3in	147	3722	7P - 6E	2	4
14	13ft-2in	158	4002	7P - 7E	2	4
15	14ft-1in	169	4282	8P - 7E	2	4
16	14ft-12in	180	4562	8P - 8E	2	4
17	15ft-11in	191	4862	6P - 5M - 6E	3	6
18	16ft-10in	202	5143	6P - 6M - 6E	3	6
19	17ft-10in	214	5423	6P - 7M - 6E	3	6
20	18ft-9in	225	5703	6P - 8M - 6E	3	6
21	19ft-8in	236	5983	7P - 7M - 7E	3	6
22	20ft-7in	247	6263	7P - 8M - 7E	3	6
23	21ft-6in	258	6543	8P - 7M - 8E	3	6
24	22ft-5in	269	6823	8P - 8M - 8E	3	6
25	23ft-4in	280	7124	7P - 6M - 6M - 6E	4	8
26	24ft-3in	291	7404	7P - 6M - 6M - 7E	4	8
27	25ft-2in	302	7664	7P - 7M - 7M - 6E	4	8
28	26ft-2in	314	7964	7P - 7M - 7M - 7E	4	8
29	27ft-1in	325	8244	8P - 7M - 7M - 7E	4	8
30	27ft-12in	336	8524	8P - 7M - 7M - 8E	4	8
31	28ft-11in	347	8825	6P - 6M - 7M - 6M - 6E	5	10
32	29ft-10in	358	9105	7P - 6M - 6M - 6M - 7E	5	10
33	30ft-9in	369	9385	6P - 7M - 7M - 7M - 6E	5	10
34	31ft-9in	381	9665	7P - 7M - 6M - 7M - 7E	5	10
35	32ft-8in	392	9945	7P - 7M - 7M - 7M - 7E	5	10
36	33ft-7in	403	10225	7P - 7M - 8M - 7M - 7E	5	10
37	34ft-6in	414	10505	8P - 7M - 7M - 7M - 8E	5	10
38	35ft-5in	425	10785	7P - 8M - 8M - 8M - 7E	5	10
39	36ft-4in	436	11065	8P - 8M - 7M - 8M - 8E	5	10
40	37ft-3in	447	11345	8P - 8M - 8M - 8M - 8E	5	10

SINGLE POWER FEED

Unique plug and play power connector allows for install of canopy and power before lighting fixture - only one power feed needed per pendant.

MODULE

Each pendant from 24" to 91" consists of a single stand-alone fitting. Longer pendants will be assembled using multiple fittings. See below legend for the codes used in the Configuration column:

- S: Stand Alone fitting
- P: Powered End fitting
- E: Unpowered End fitting
- M: Middle fitting

ACOUSTIC BAFFLES

For an unlit acoustic baffle we will use the same modules and dimensions as with the lit pendants. Instead of a Powered End fitting at the beginning of the run, we will use an Unpowered End fitting. Please note no canopy will be supplied with any acoustic baffle.

DOUBLE CEILING MOUNT

To make installation fast and safe, the Linea pendants above 91" will be supplied with a Double Ceiling Mount. This means you'll be able to fix two suspension cables to one ceiling mount, which decreases the installation time significantly.

EMERGENCY MODULES

Emergency modules can be supplied as a custom option for the Linea Range. If this is the case, the configuration of the full run will require two independently powered ends, one at each end:

P-M-M- ...-M-P

Please contact us if your project requires a more custom configuration.

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0




LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
 LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
 WWW.LUXXBOX.COM

FITTING DIMENSIONS


STANDALONE (S)

Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2S	2ft-0.5in	24	620
3S	2ft-11.5in	35	900
4S	3ft-10.5in	46	1180
5S	4ft-9.5in	57	1460
6S	5ft-8.6in	69	1741
7S	6ft-7.6in	80	2021
8S	7ft-6.6in	91	2301

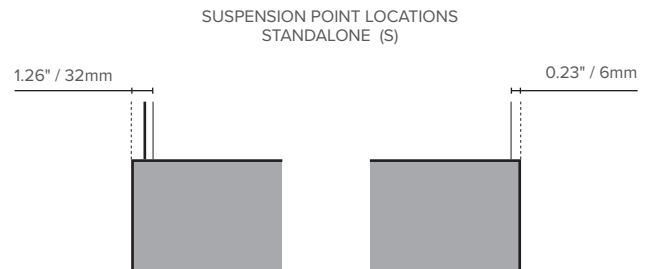

POWERED AND UNPOWERED END (P/E)


Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2P/2E	1ft-11.7in	24	600
3P/3E	2ft-10.7in	35	880
4P/4E	3ft-9.7in	46	1160
5P/5E	4ft-8.7in	57	1440
6P/6E	5ft-7.8in	69	1721
7P/7E	6ft-6.8in	80	2001
8P/8E	7ft-5.9in	91	2281

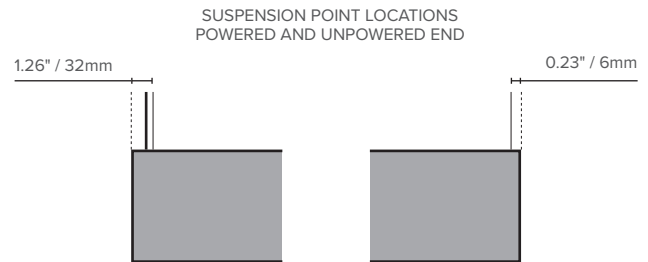

Note: The distance from the edge of the fixture to the suspension point is the same whether the End fitting is powered or unpowered


MIDDLE (M)

Fitting Code	Overall Length (ft-in)	Overall Length (in)	Overall Length (mm)
2M	1ft-10.9in	24	580
3M	2ft-9.9in	35	860
4M	3ft-8.9in	46	1140
5M	4ft-8in	57	1420
6M	5ft-7in	69	1701
7M	6ft-6in	80	1981
8M	7ft-5.1in	91	2261

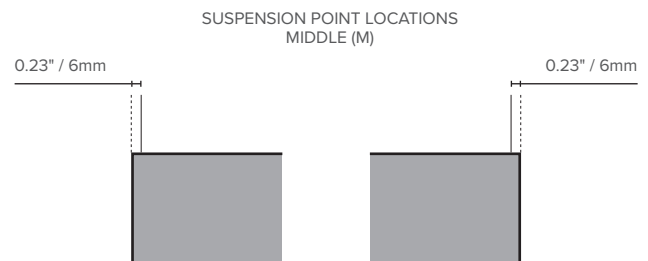


TOP VIEWS


SMALL

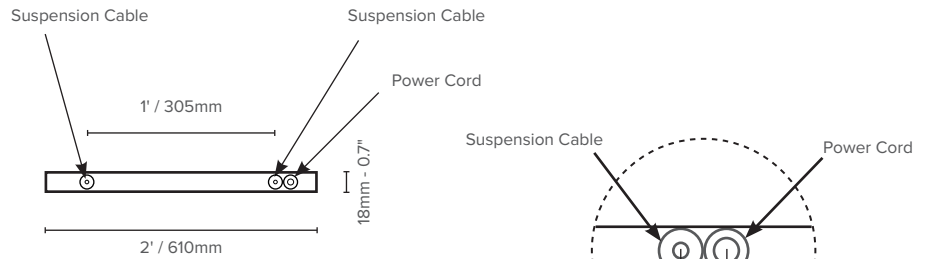


MEDIUM

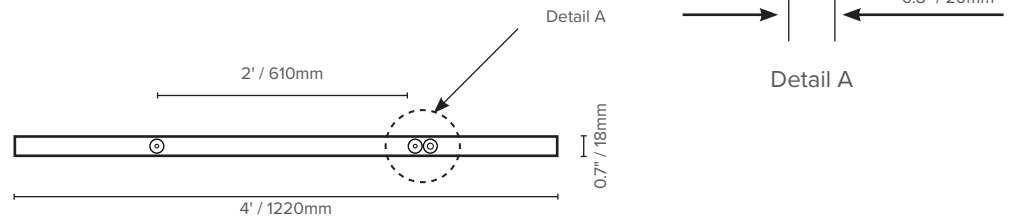

LARGE

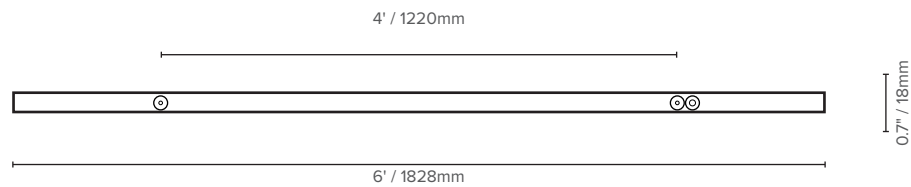


EXTRA-LARGE

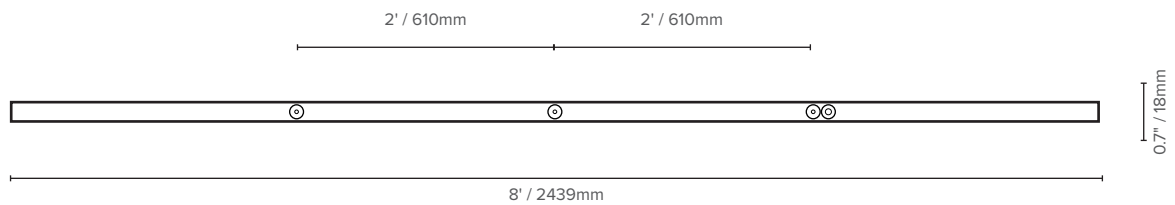


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

SIDE VIEWS


SMALL

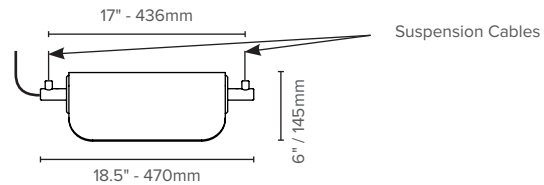


MEDIUM

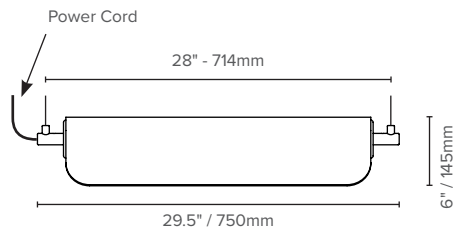

LARGE

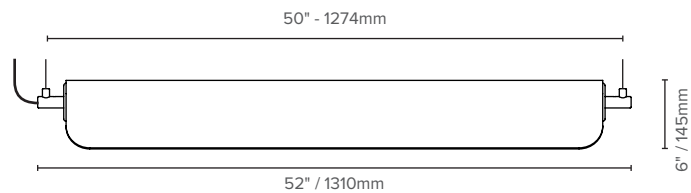


EXTRA-LARGE

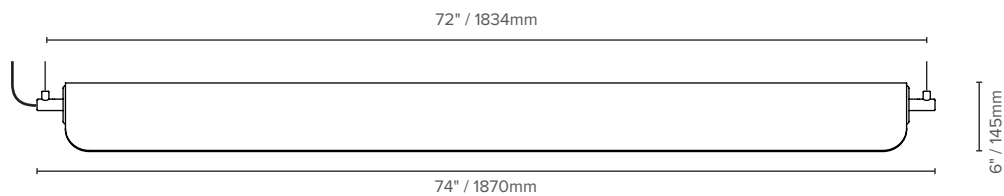



Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

TOP VIEWS

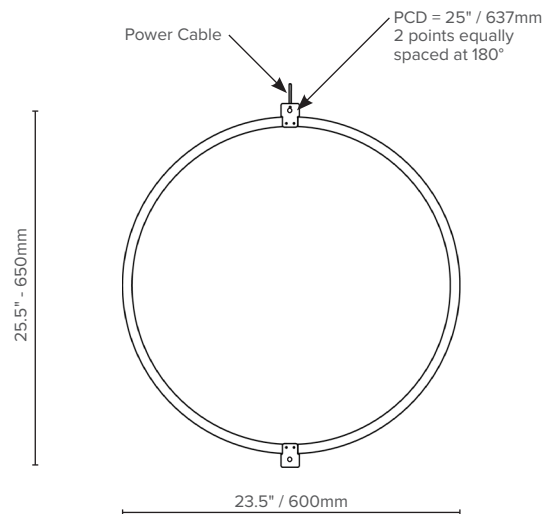


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


TOP VIEWS

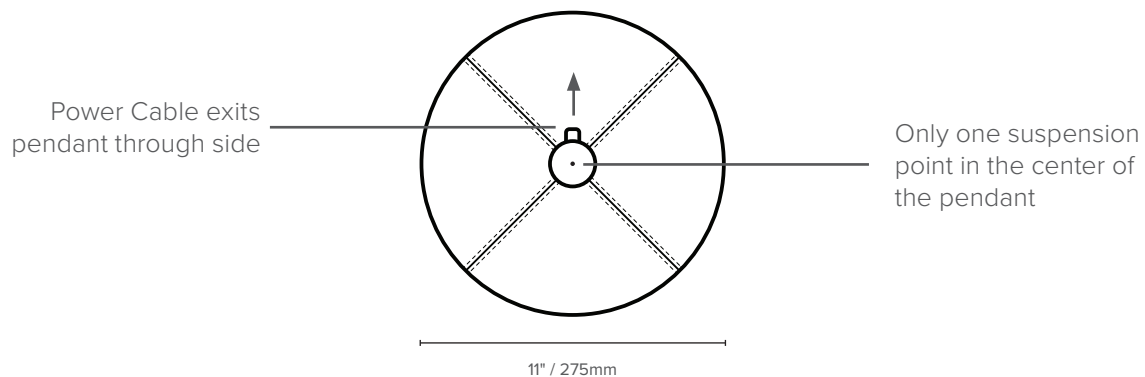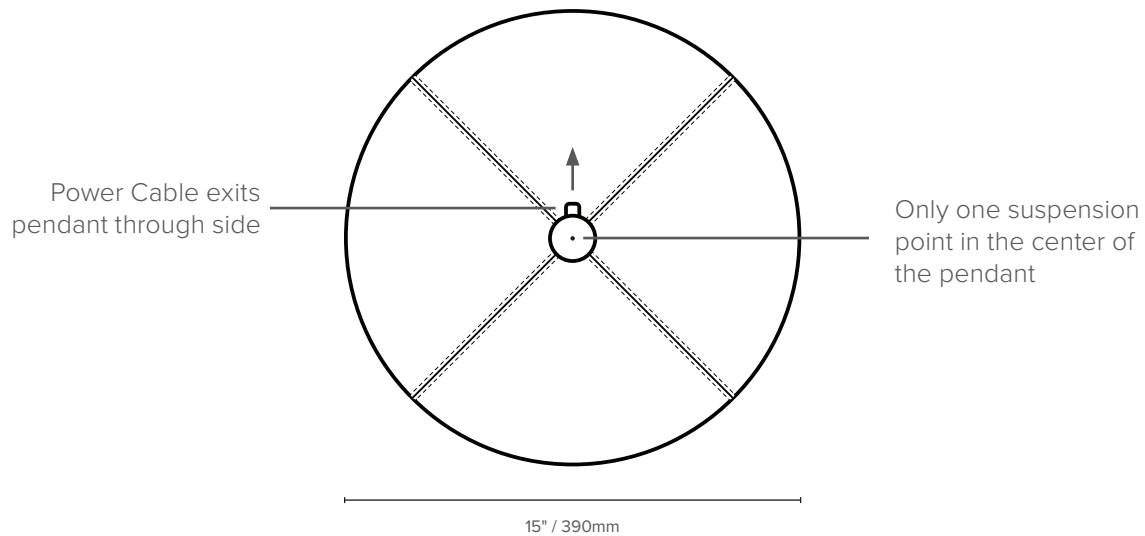

ceiling canopy - AUS




ceiling canopy - US




Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


SMALL

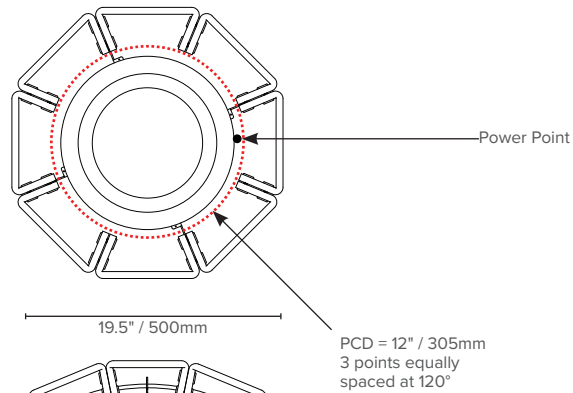

MEDIUM

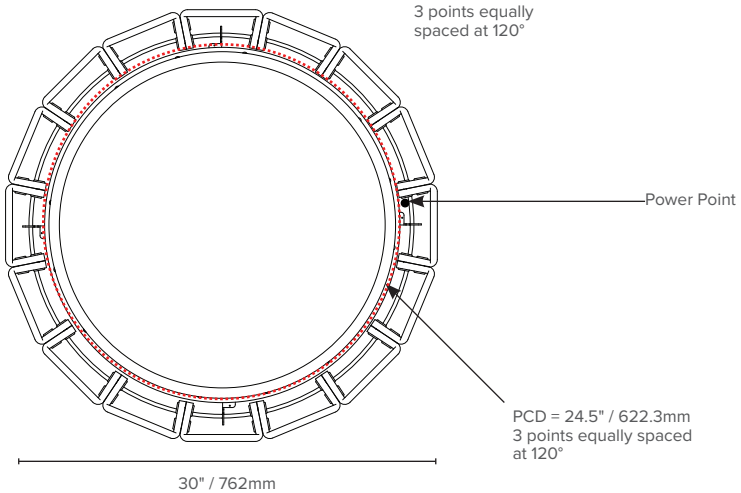


LARGE

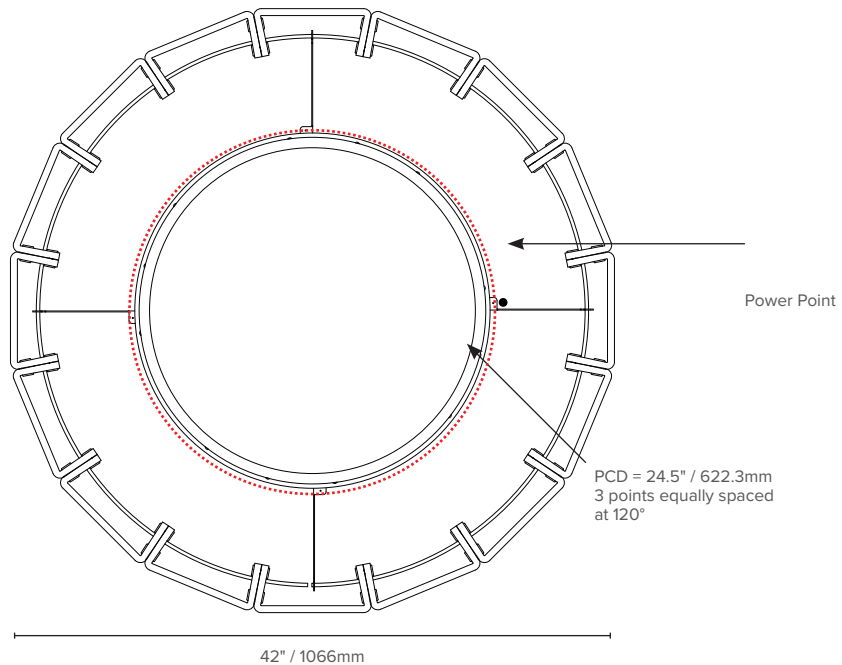


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


PORTRAIT

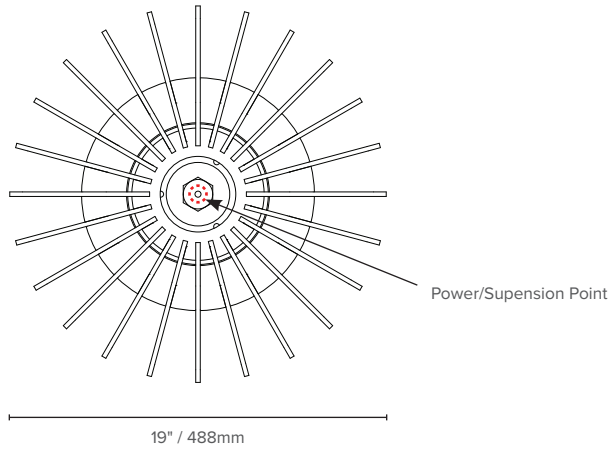


LANDSCAPE

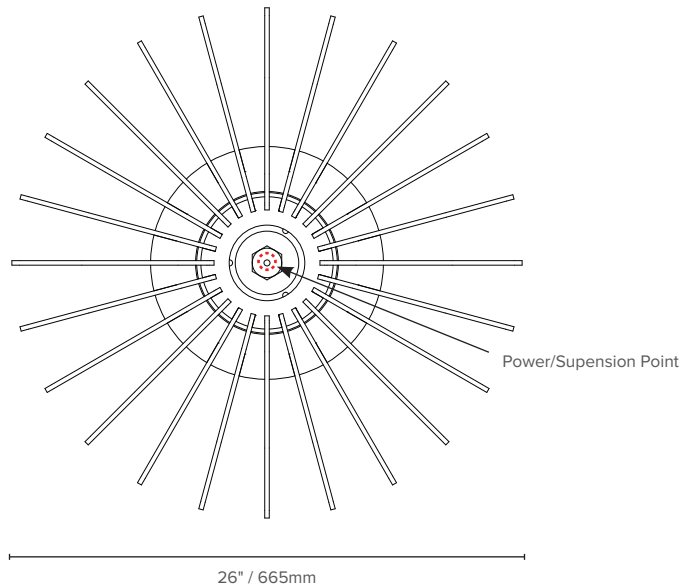

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxbox-Acoustic-Lighting-Install-Instructions-v4.0

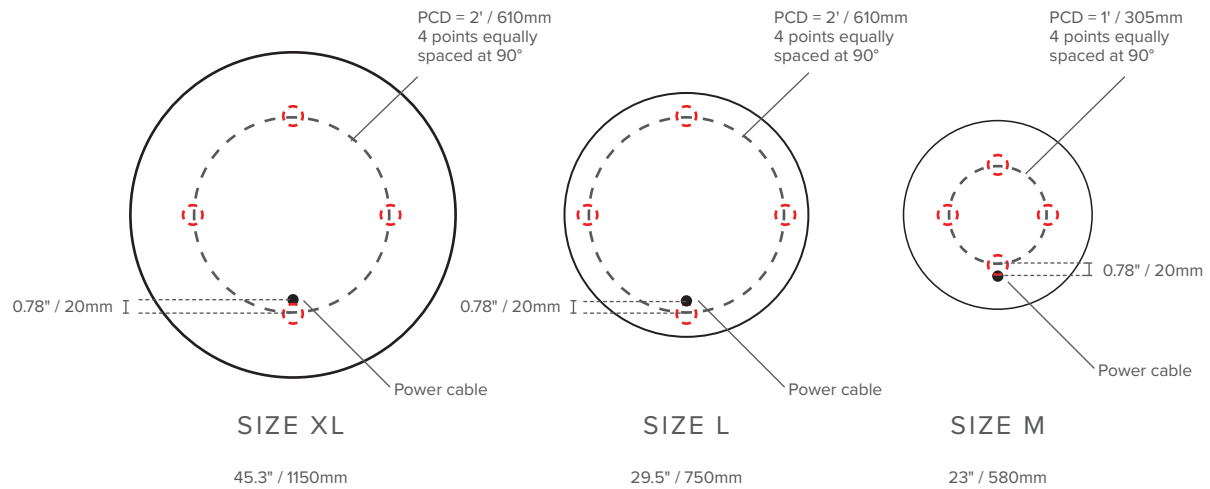


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

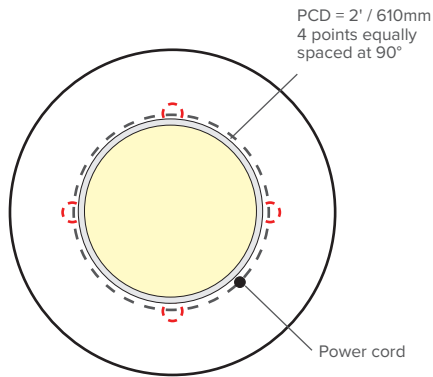


SIZE XL

45.3" / 1150mm

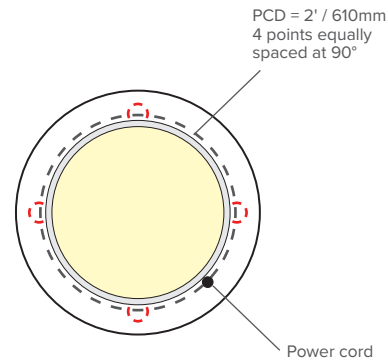


SIZE L

29.5" / 750mm

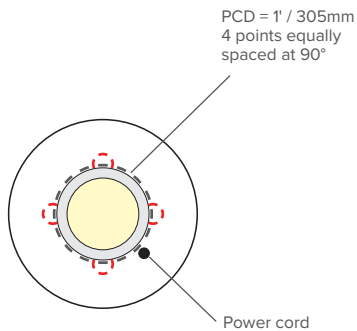

SIZE M

23" / 580mm



SIZE S

17.5" / 450mm

	NORTH AMERICA			GLOBAL		
PRODUCT	Remote Driver	Concealed Driver	On-Board Driver	Remote Driver	Concealed Driver	On-Board Driver
LX-VE-S	SA	CD11	SA	SB	CD11	SB
LX-VE-M/L-D	SA	CD11	SA	SB	CD11	SB
LX-VE-M/L-DI	SA	CD13	SA	SB	CD13	SB
LX-BC-L/M/S	SA	CD11	SA	SB	CD11	SB
LX-SI-L/M/S	SA	CD11	SA	SB	CD11	SB
LX-VER-S	SA	CD11	SA	SB	CD11	SB
LX-VER-M/L-D	SA	CD11	SA	SB	CD11	SB
LX-VER-M/L-DI	SA	CD13	SA	SB	CD13	SB
LX-MA-5	SA	CD11	SA	SB	CD11	SB
LX-MA-5-DI	SA	CD13	SA	SB	CD13	SB
LX-MA-3	SA	CD11	SA	SB	CD11	SB
LX-MA-3-DI	SA	CD11	SA	SB	CD11	SB
LX-DA-XL/L/M/S	SA	CD13	SA	SB	CD13	SB
LX-VEC-S	SA	CD13	-	SB	CD13	-
LX-VEC-M/L-D	SA	CD11	SA	SB	CD11	SB
LX-VEC-M/L-DI	SA	CD13	SA	SB	CD13	SB
LX-AC	SA	-	-	SB	-	SB
LX-BL-XL/L/M/S	SA	CD11	-	SB	CD11	-
LX-LN	-	-	SA	-	-	SB
LX-WPU-XL/L/M/S	SA	CD11	-	SB	CD11	-
LX-WPD-XL/L/M	SA	CD11	-	SB	CD11	-
LX-HH-M/S	SA	-	-	SB	-	-
LX-IL	SA	-	-	SA	-	-
LX-PL-L/M/S	SA	-	-	SB	-	-
LX-NP	SA	-	-	SB	-	-

	INDEX FOR CANOPY INFORMATION				
CANOPY	SA	SB	CD11	CD13	CDG
PAGE	13	13	14	14	TBC


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0



CANOPY DIMENSIONS


REMOTE AND ON-BOARD OPTIONS

SB CANOPY (GLOBAL)




1.96" / 50mm

BOTTOM VIEW



SIDE VIEW




TOP VIEW




RENDERED VIEW

SA CANOPY (NORTH AMERICA)




4.7" / 120mm

BOTTOM VIEW



SIDE VIEW




TOP VIEW



RENDERED VIEW

MOUNTING PLATE PATTERN (NORTH AMERICA)

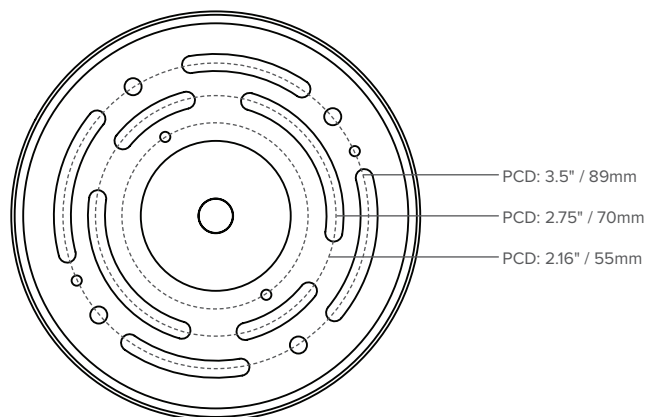


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0




LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM


CD11 CANOPY (GLOBAL / NORTH AMERICA)



BOTTOM VIEW




SIDE VIEW




more detailed dimensions on previous page


TOP VIEW




CD 13 (GLOBAL / NORTH AMERICA)



BOTTOM VIEW





SIDE VIEW



more detailed dimensions on previous page

TOP VIEW

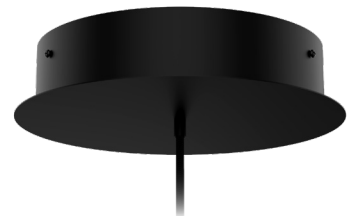

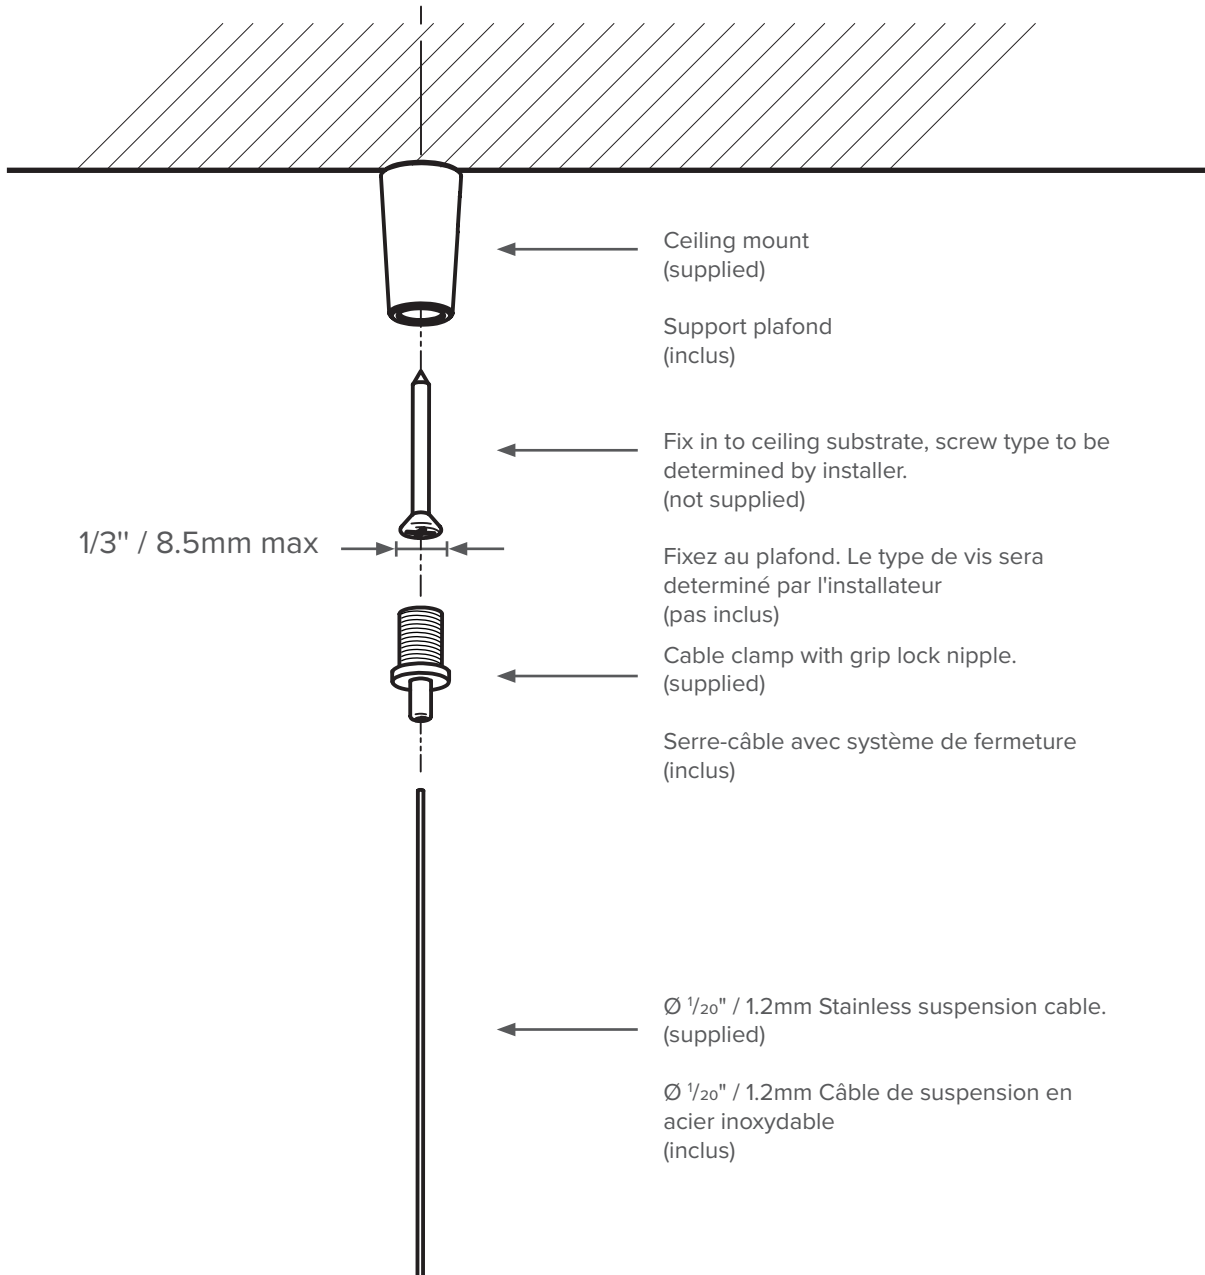



Caution, risk of electric shock


INFORMATION

⚠ All electrical work, including the installation and wiring of drivers to be completed by a licensed electrician. (Tous le travaux électrique et d'installation doivent être effectués par un électricien autorisé.)

- Please refer to driver and accompanying documentation for further information regarding installation / wiring. (Veuillez consulter l'information sur l'alimentation et la documentation additionnelle pour plus information sur l'assemblage et l'installaiton de ce produit.)
- Indoor use only (Pour l'interieur seulement)
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. (Le source de lumière dans ce luminaire doit être remplacé uniquement par le fabricant ou par un agent autorisé.)
- Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

TERMINALS / BORNES ÉLECTRIQUES

1. Line Voltage / Mains Power (Tension de ligne)
2. DC Output (Sortie C.C.)
3. Dimming Control (Gradateur)

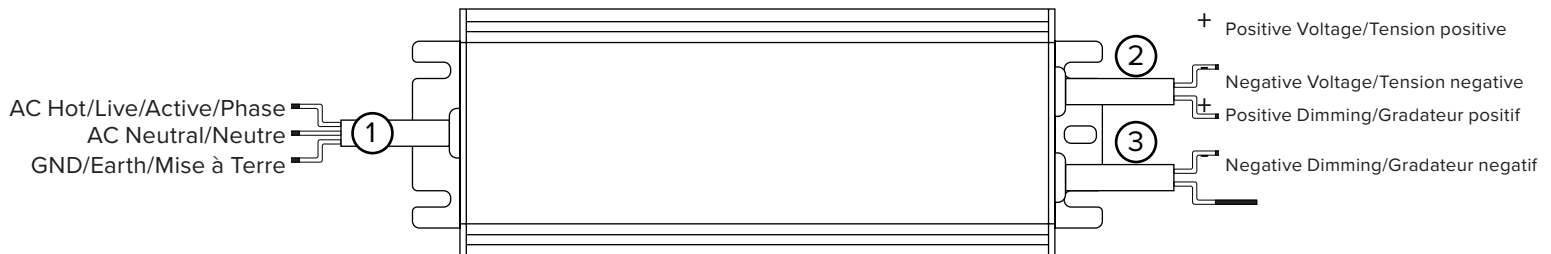

WIRE COLOURS / COULEURS DES CÂBLES

- Hot/Live/Active/Phase: Brown or as per wire label / Marron ou selon l'etiquette du câble
- Neutral/Neutre: Blue or as per wire label / Bleu ou selon l'etiquette du câble
- Ground/Mise à Terre: Green-Yellow or as per wire label / Vert-jaune ou selon l'etiquette du câble
- Dimming Positive (+)/Gradateur (+): Purple or as per wire label / Mauve ou selon l'etiquette du câble
- Dimming Negative (-)/Gradateur (-): Grey or as per wire label / Gris ou selon l'etiquette du câble
- Output (+)/Sortie (+): Red or as per wire label / Rouge ou selon l'etiquette du câble
- Output (-)/Sortie (-): Black or as per wire label / Noir ou selon l'etiquette du câble




Caution, risk of electric shock

INFORMATION

- ⚠ All electrical work, including the installation and wiring of drivers to be completed by a licensed electrician. (Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé.)
- Please refer to driver and accompanying documentation for further information regarding installation / wiring. (Veuillez consulter l'information sur l'alimentation et la documentation additionnelle pour plus d'information sur l'assemblage et l'installation de ce produit.)
 - Indoor use only (Pour l'intérieur seulement)
 - The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. (Le source de lumière dans ce luminaire doit être remplacé uniquement par le fabricant ou par un agent autorisé.)
 - Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

TERMINALS / BORNES ÉLECTRIQUES

1. Line Voltage / Mains Power (Tension de ligne)
2. DC Output (Sortie C.C.)
3. Dimming Control (Gradateur)

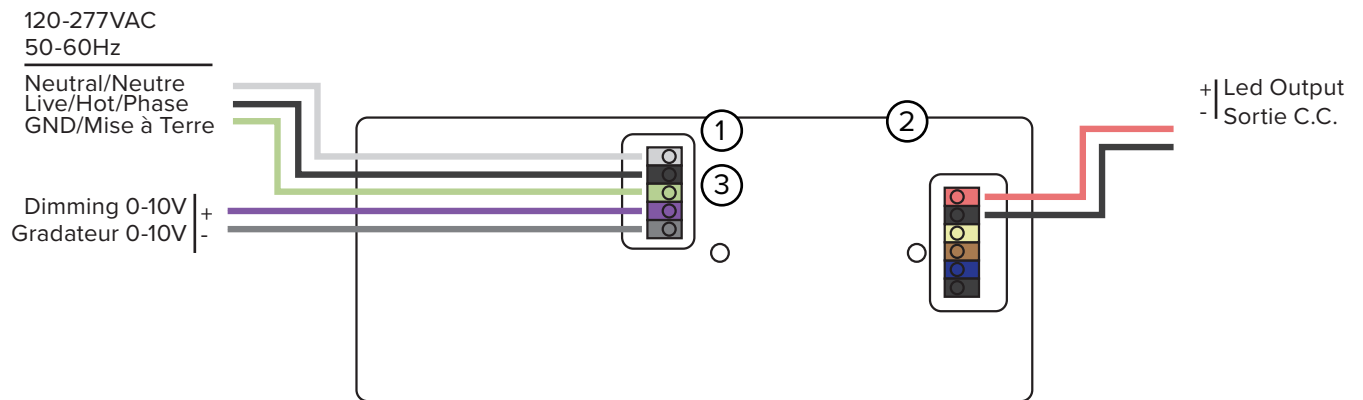

WIRE COLOURS / COULEURS DES CÂBLES

- Hot/Live/Phase: Black/Noir
- Neutral/Neutre: White/Blanc
- Ground/Mise à Terre: Green/Vert
- Dimming Positive (+)/Gradateur (+): Purple or as per wire label / Mauve ou selon l'étiquette du câble
- Dimming Negative/Gradateur (-): Grey or as per wire label / Gris ou selon l'étiquette du câble
- Output (+): Red or as per wire label / Rouge ou selon l'étiquette du câble
- Output (-): Black or as per wire label / Noir ou selon l'étiquette du câble

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxbox-Acoustic-Lighting-Install-Instructions-v4.0




Caution, risk of electric shock

INFORMATION

- ⚠ All electrical work, including the installation and wiring of drivers to be completed by a licensed electrician. (Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé.)
- Please refer to driver and accompanying documentation for further information regarding installation / wiring. (Veuillez consulter l'information sur l'alimentation et la documentation additionnelle pour plus d'information sur l'assemblage et l'installation de ce produit.)
 - Indoor use only (Pour l'intérieur seulement)
 - The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. (Le source de lumière dans ce luminaire doit être remplacé uniquement par le fabricant ou par un agent autorisé.)
 - Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

TERMINALS / BORNES ÉLECTRIQUES


1. Line Voltage / Mains Power (Tension de ligne)
2. DC Output (Sortie C.C.)
3. Dimming Control (Gradateur)

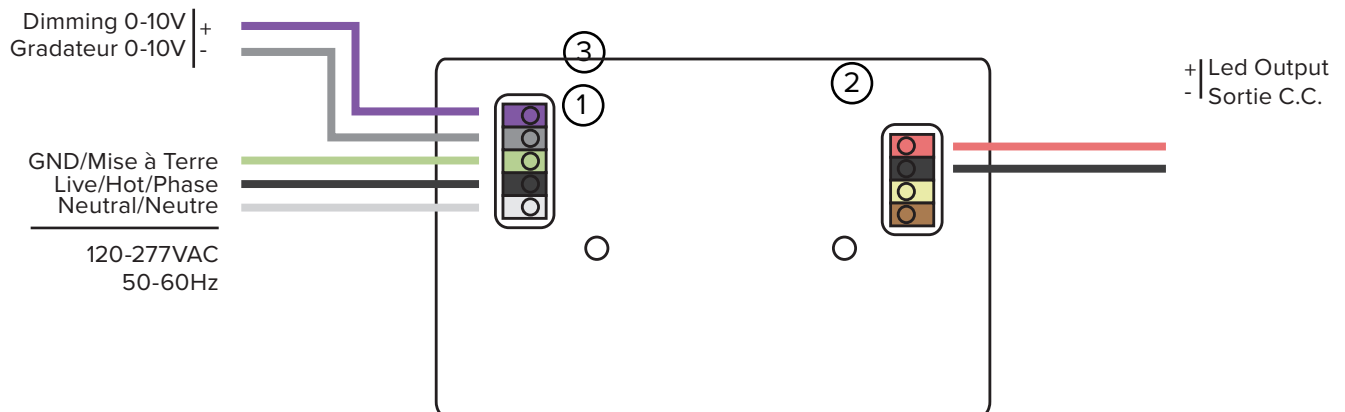

WIRE COLOURS / COULEURS DES CÂBLES

- Hot/Live/Phase: Black/Noir
- Neutral/Neutre: White/Blanc
- Ground/Mise à Terre: Green/Vert
- Dimming Positive (+)/Gradateur (+): Purple or as per wire label / Mauve ou selon l'étiquette du câble
- Dimming Negative (-): Grey or as per wire label / Gris ou selon l'étiquette du câble
- Output (+): Red or as per wire label / Rouge ou selon l'étiquette du câble
- Output (-): Black or as per wire label / Noir ou selon l'étiquette du câble

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

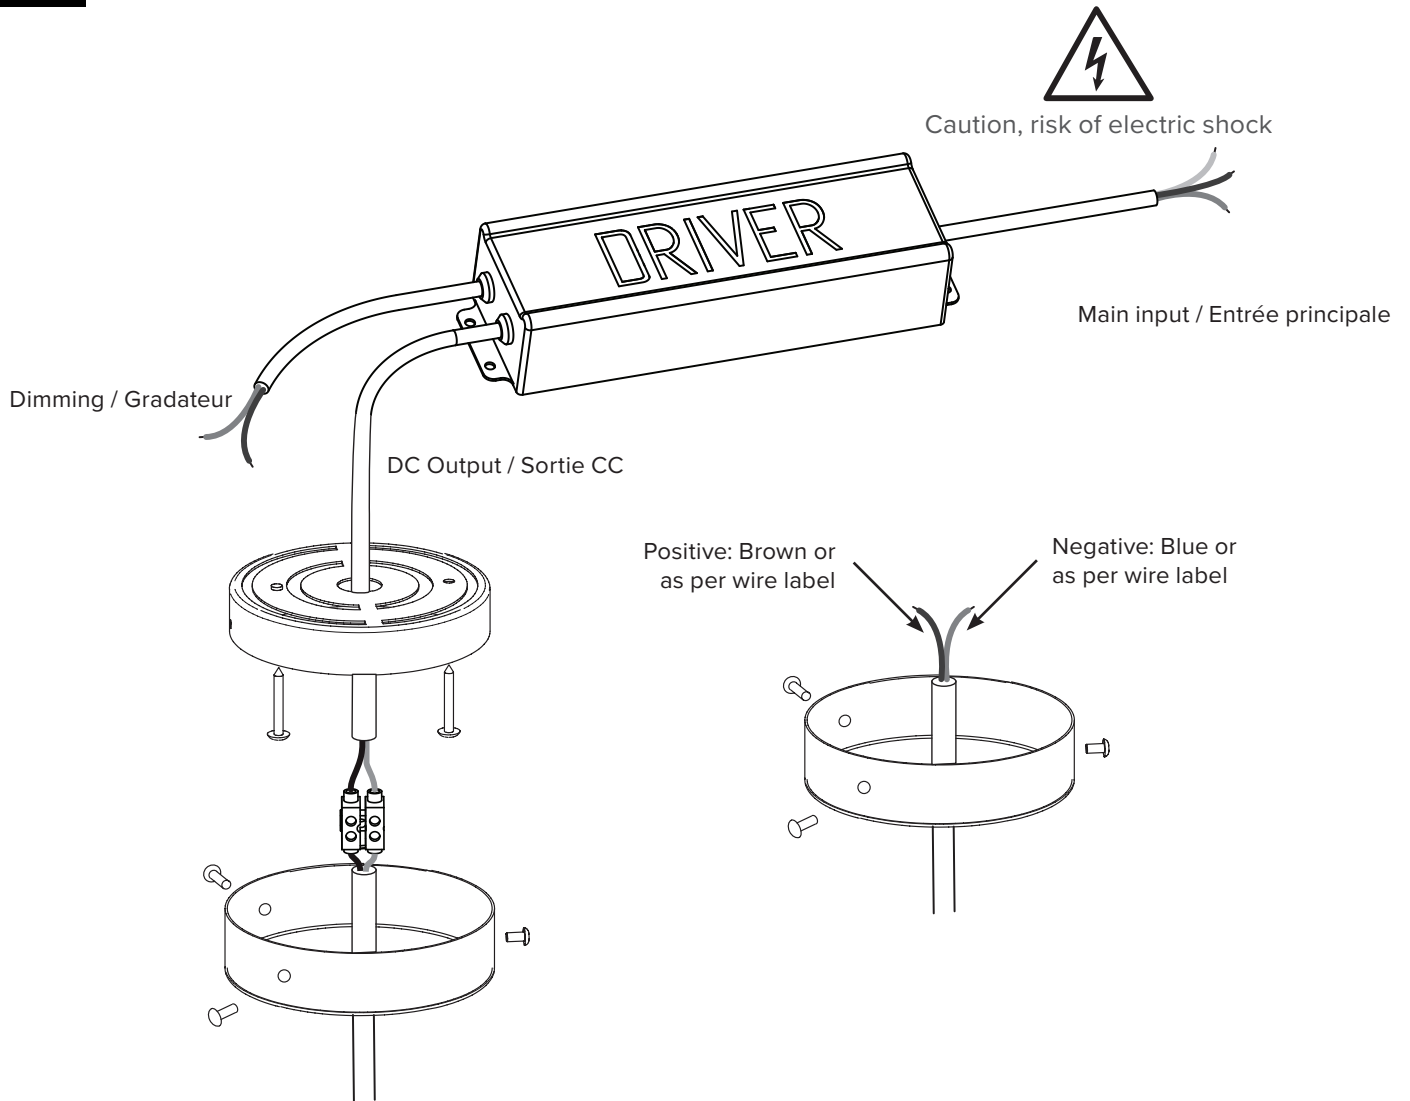

Wire Colors / Couleurs des câbles

- Hot/Live/Phase: As per wire label / Selon l'etiquette du câble
- Neutral/Neutre: As per wire label / Selon l'etiquette du câble
- Ground/Mise à Terre: As per wire label / Selon l'etiquette du câble
- Dimming Positive(+)/Gradateur Positif(+): Purple or as per wire label/Mauve ou selon l'etiquette du câble
- Dimming Negative(-)/Gradateur Negatif(-): Grey or as per wire label/Gris ou selon l'etiquette du câble
- Output (+)/Sortie(+): Red or as per wire label/Rouge ou selon l'etiquette du câble
- Output (-)/Sortie(-): Black or as per wire label/Noir ou selon l'etiquette du câble


⚠ This product is to be installed by a qualified electrician only. Ce produit doit être installé par un électricien autorisé

⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


- ⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.
- ⚠ Il est recommandé de choisir le type de fixations avant de commencer l'installation
- ⚠ This product is to be installed by a qualified electrician only.
- ⚠ Tous le travaux électriques et d'installation doivent être effectués par un électricien autorisé.

①

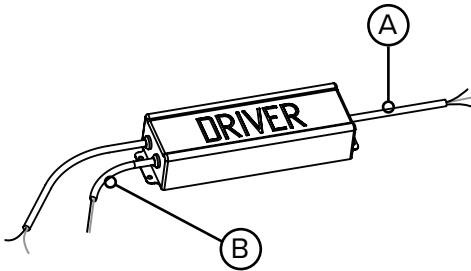


Licensed electrician to terminate Mains Input (A) and Dimming Control (B) to Mains Power. Driver Schematics on p.16 (Connectez l'entrée C.A. et les câbles du gradateur à l'ide l'alimentation principale. Schémas électriques à la page 16)

②

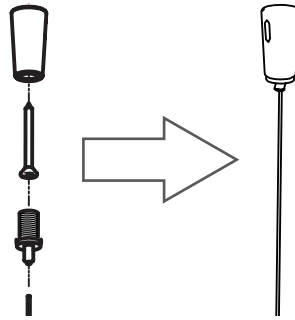


Hang shade from ceiling using mounting hardware provided. See page 15 for additional details. (Suspendre l'abat-jour avec la quincaillerie de montage. Voyez la page 15 pour plus d'information)

③

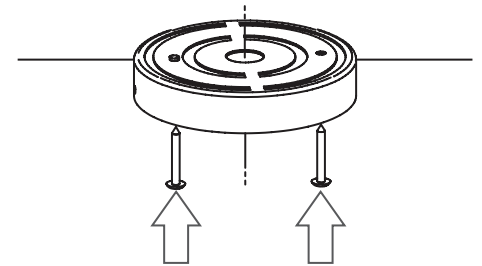


Mount canopy base to ceiling. (Fixez le pavillon en position)

④

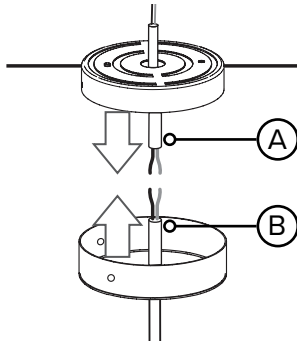


Insert DC output (A) from Driver into canopy base, then insert the DC input (B) from pendant or light source through canopy cover. (Insérez la sortie CC (A) de l'alimentation à travers de la base du pavillon. Après, insérez l'entrée CC du luminaire à travers le plaque de montage du pavillon)

⑤

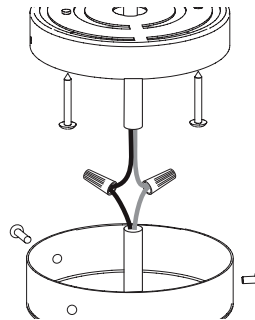

Terminate DC input to DC output inside canopy. Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (Connectez l'entrée CC et la sortie CC à l'intérieur du pavillon. L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)


⑥

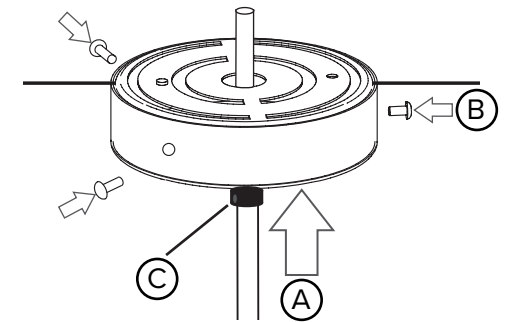

Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), resserez les vis (B) et ajustez la bride de décharge (C).)



Caution, risk of electric shock

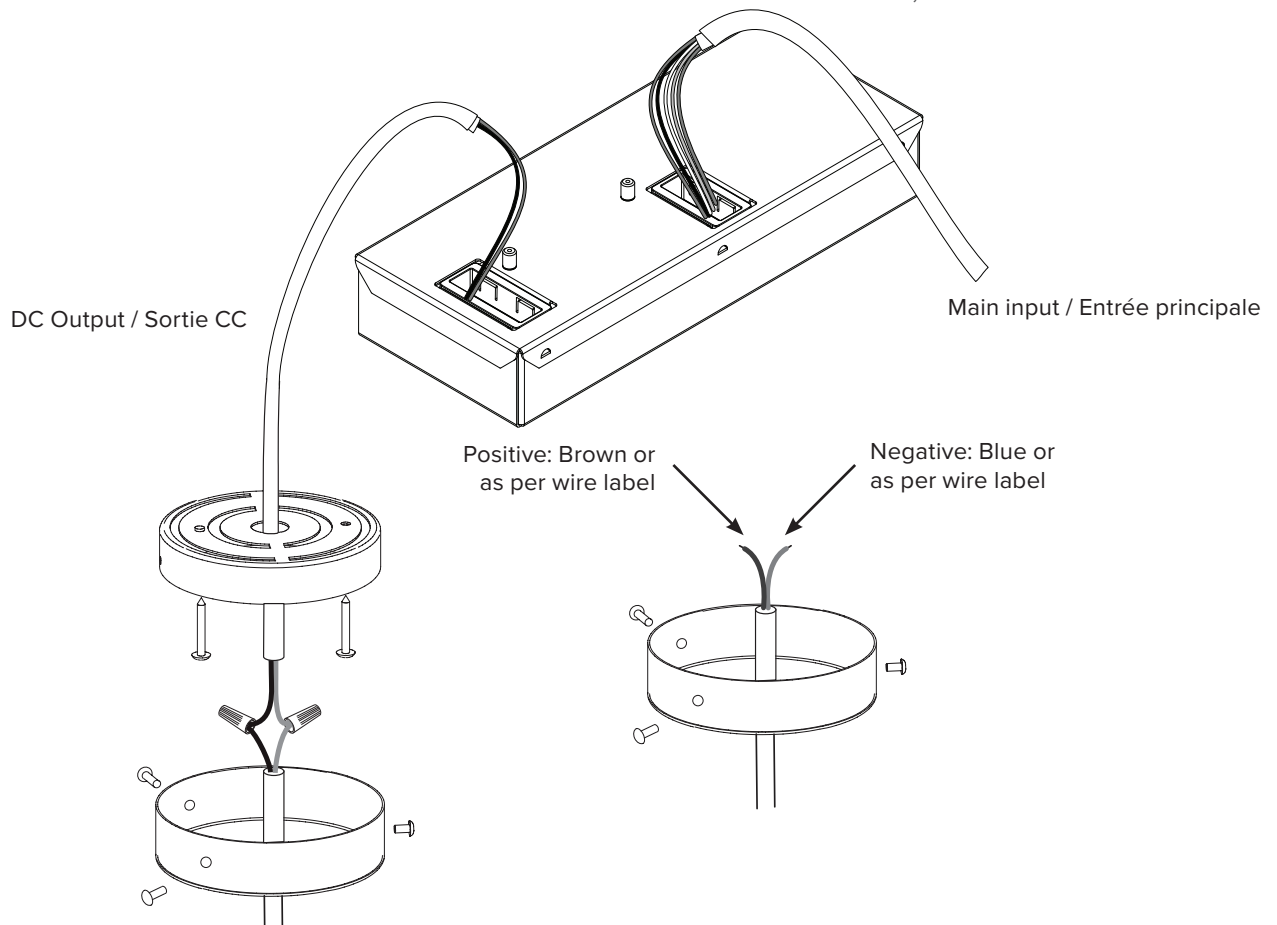

Wire Colors / Couleurs des câbles

- Hot/Live/Active/Phase: Black or as per wire label/Noir ou selon l'etiquette du câble
- Neutral/Neutre: White or as per wire label/blanc ou selon l'etiquette du câble
- Ground/Earth/Mise à Terre: Green or as per wire label/Vert ou selon l'etiquette du câble
- Dimming Positive(+)/Gradateur Positif(+): Purple or as per wire label/Mauve ou selon l'etiquette du câble
- Dimming Negative(-)/Gradateur Negatif(-): Grey or as per wire label/Gris ou selon l'etiquette du câble
- Output (+)/Sortie(+): Red or as per wire label/Rouge ou selon l'etiquette du câble
- Output (-)/Sortie(-): Black or as per wire label/Noir ou selon l'etiquette du câble


⚠ This product is to be installed by a qualified electrician only. Ce produit doit être installé par un électricien autorisé

⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


- ⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.
- ⚠ Il est recommandé de choisir le type de fixations avant de commencer l'installation)
- ⚠ This product is to be installed by a qualified electrician only.
- ⚠ Tous le travaux électriques et d'installation doivent être effectués par un électricien autorisé).

①

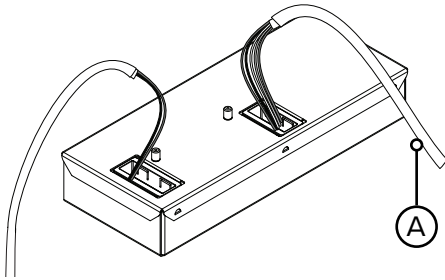


Licensed electrician to terminate Mains Input and Dimming Control (A) to Mains Power. Driver Schematics on p.17, 18. (Connectez l'entrée C.A. et les câbles du gradateur à l'Idc l'alimentation principale. Schémas électriques à la page 17, 18.)

②




Hang shade from ceiling using mounting hardware provided. See page 15 for additional details. (Suspendre l'abat-jour avec la quincaillerie de montage. Voyez la page 15 pour plus d'information)

③

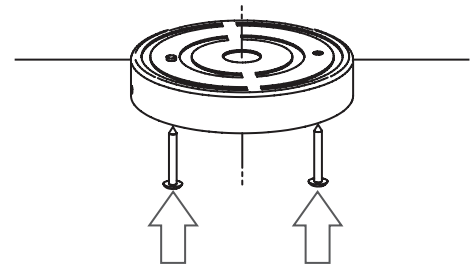


Mount canopy base to ceiling. (Fixez le pavillon en position)

④

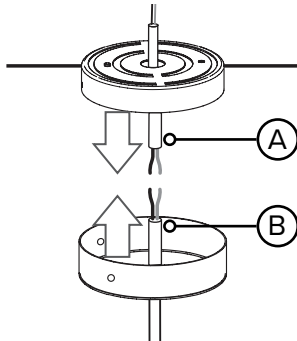


Insert DC output (A) from Driver into canopy base, then insert the DC input (B) from pendant or light source through canopy cover. (Insérez la sortie CC (A) de l'alimentation à travers de la base du pavillon. Après, insérez l'entrée CC du luminaire à travers le plaque de montage du pavillon)

⑤

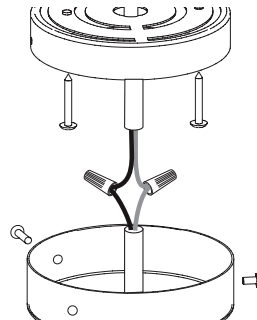

Terminate DC input to DC output inside canopy. Power supply must be isolated prior to connection or disconnection of cables. Fix driver to junction box as per US standards Failure to do so will result in damage to the luminaire components. (Connectez l'entrée CC et la sortie CC a l'interieur du pavillon. L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Fixez le bloc d'alimentation á la boîte de junction selon les standards américains Le non-respect de cette consigne peut endommager les composants électriques.)

⑥

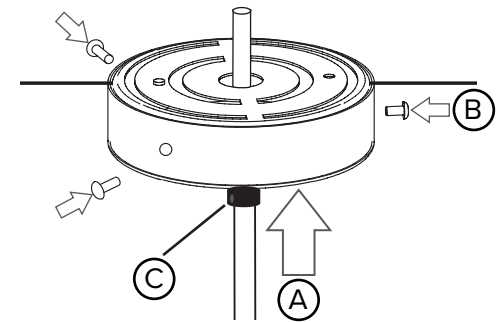

Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressérez les vis (B) et ajustez la bride de décharge(C).)


⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.

⚠ Il est recommandé de choisir le type de fixations avant de commencer l'installation)

⚠ This product is to be installed by a qualified electrician only.


⚠ Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé).

①

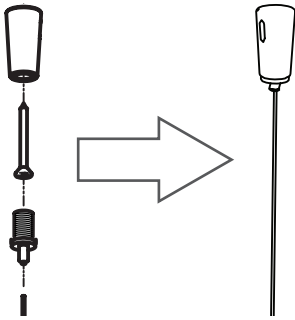


Hang shade from ceiling using mounting hardware provided. See page 15 for additional detail. (Suspendez l'abat-jour avec la quincaillerie de montage. Plus info à la page 15)

②

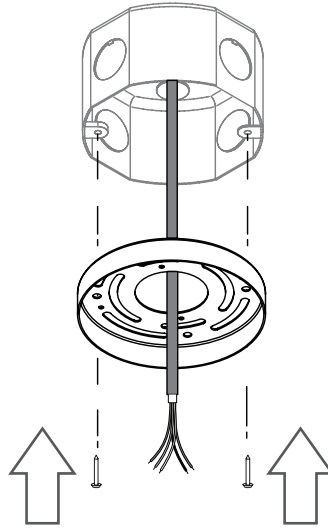


Mount canopy base to ceiling. (Fixez le pavillon en position)

③

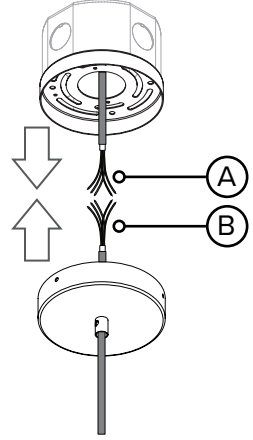


Licensed electrician to terminate Mains Power to Driver Input. EldoLED and Meanwell Driver schematics on p. 16, 17, 18. Power supply must be isolated prior to connection or disconnection of cables. (Connectez l'alimentation principale à l'entrée de l'alimentation. Schémas électriques du EldoLED et Meanwell à la page 16, 17, 18. L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles.)

④

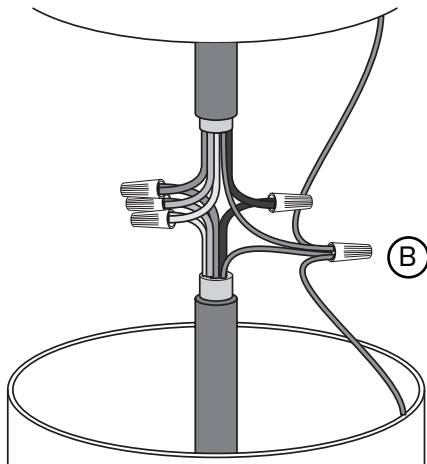


Licensed electrician to terminate ground connections from canopy to ground main input (B). Driver schematics on pg. 16, 17, 18. (Connectez la mise à terre du pavillon à la mise à terre de l'alimentation. Schémas électriques à la page 16, 17, 18.)

⑤

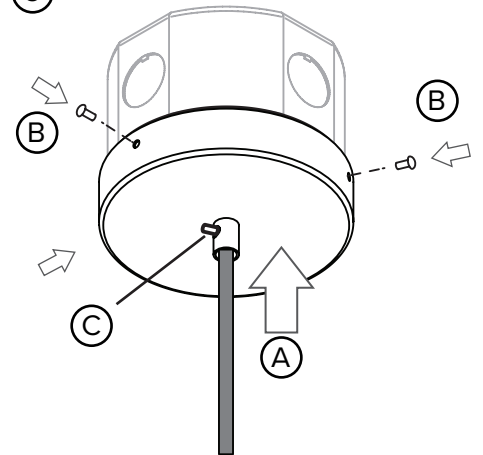


Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressértez les vis (B) et ajustez la bride de décharge (C).)

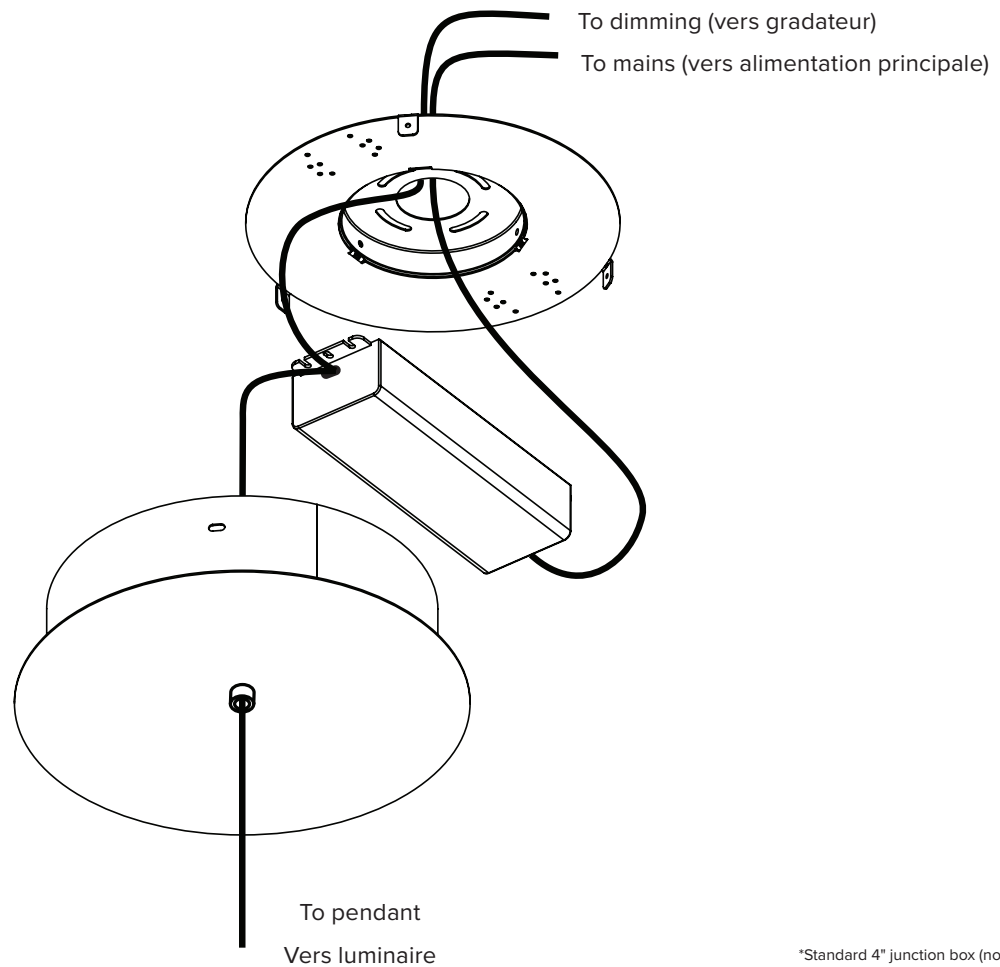


*Standard 4" junction box (not included)
*Standard 4" boîte de jonction (pas inclus)

CANOPY DIMENSIONS

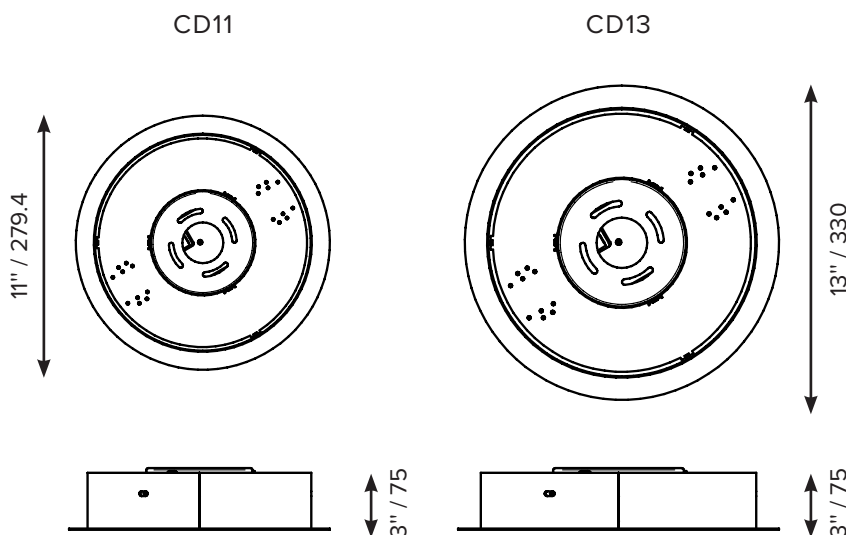

ISOMETRIC VIEWS

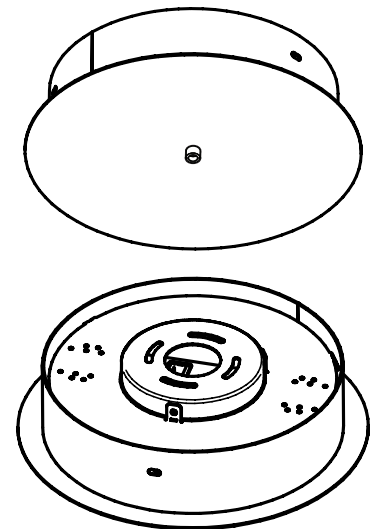

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate. Il est recommandé de choisir le type de fixations avant de commencer l'installation).

⚠ This product is to be installed by a qualified electrician only. Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé).


⚠ If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

⚠ Caution, risk of electric shock. Basic insulation maintained between LV supply and control conductors


⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

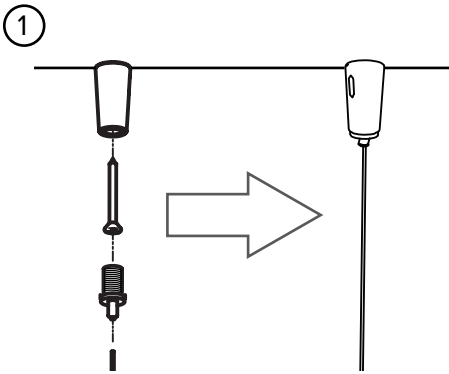


Hang shade from ceiling using mounting hardware provided. See page 16 for additional detail. (Suspendez l'abat-jour avec la quincaillerie de montage, pur details additionels voyez la page 15)

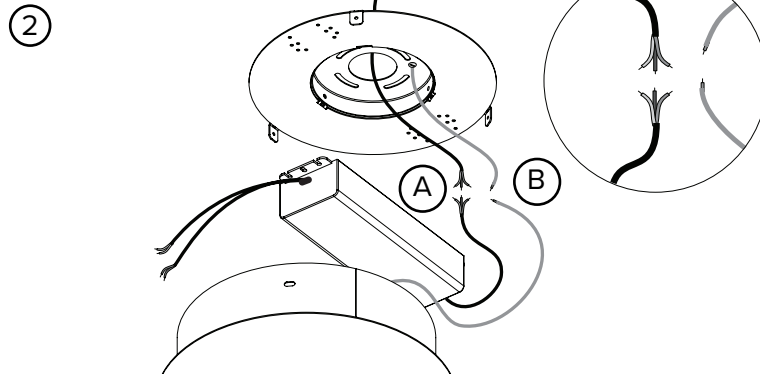


Insert main power and dimming cables through Canopy Base. Licensed electrician to terminate Mains power to Driver Input (A) and ground connections from canopy to ground main input (B). Driver schematics on pg. 16 (Insérez le câble d'alimentation principale et le câble du gradateur à travers la base du pavillon. Connectez l'alimentation principale à l'entrée C.A. (A) et la mise à terre du pavillon à la mise à terre principale. Voyez schémas électriques à la page 16)

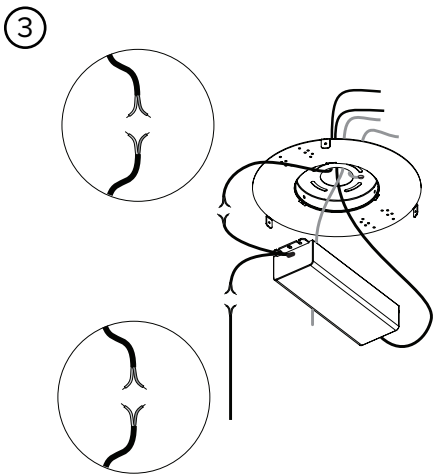

Mount canopy base to ceiling. (Fixez le pavillon en position)

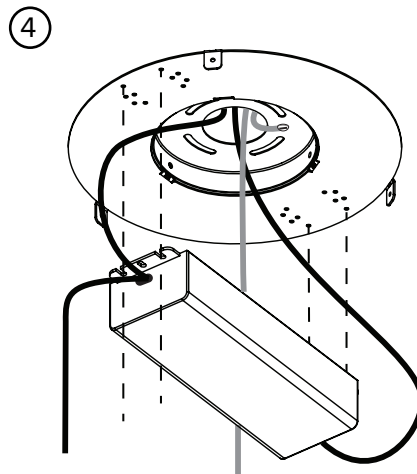


Fix driver to canopy base using the screws provided. (Fixez l'alimentation aux pavillon avec les vis inclus)

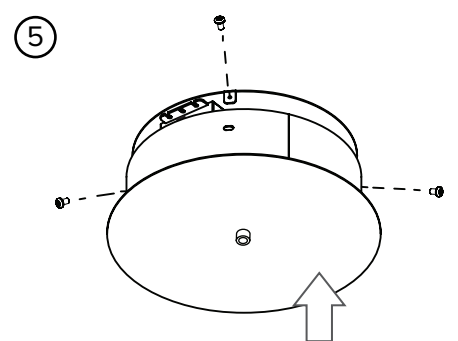


Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressérez les vis (B) et ajustez la bride de décharge(C).)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

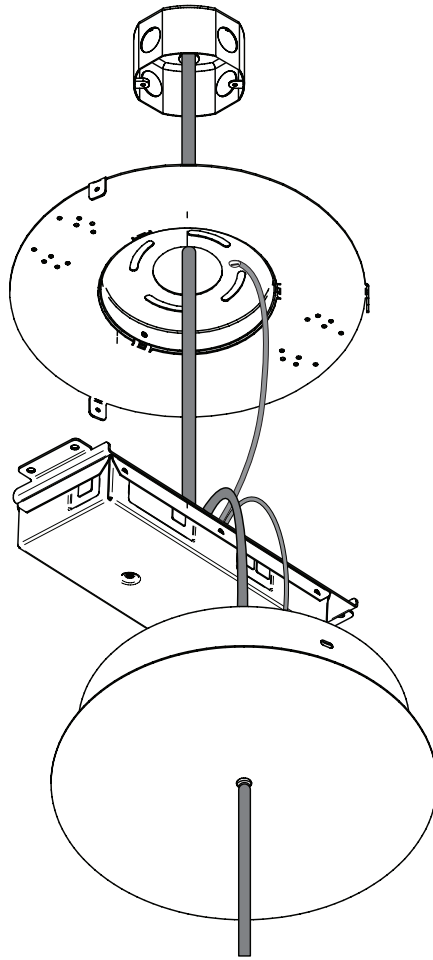


CANOPY DIMENSIONS / DIMENSIONS DU PAVILLON


CD11

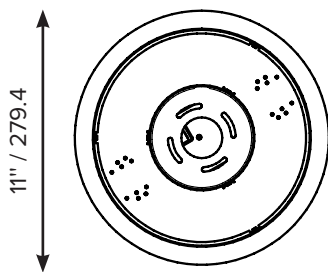

CD13



ISOMETRIC VIEWS

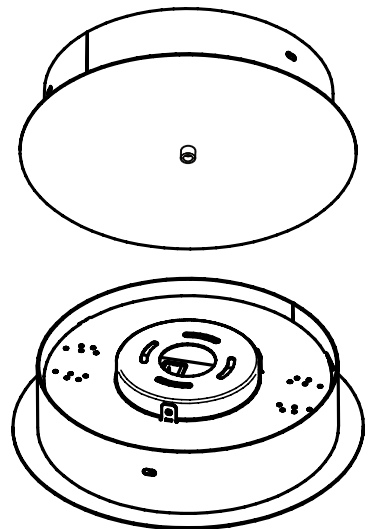

*Standard 4" Junction Box (not included)

*Standard 4" Boîte de Junction (pas inclus)


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate. Il est recommandé de choisir le type de fixations avant de commencer l'installation)

⚠ This product is to be installed by a qualified electrician only. Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé).


⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

①




Insert main power cable through Canopy Base and screw this to Standard Junction Box. (Insérez le câble d'alimentation principal à travers la base du pavillon et fixez la plaque de montage du pavillon à la boîte de connexion)

②

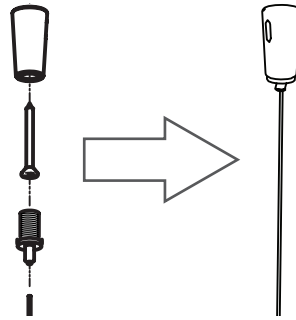


Hang shade from ceiling using mounting hardware provided. See page 15 for additional detail. (Suspendre l'abat-jour avec la quincaillerie de montage. Voyez la page 15 pour plus d'information)

③

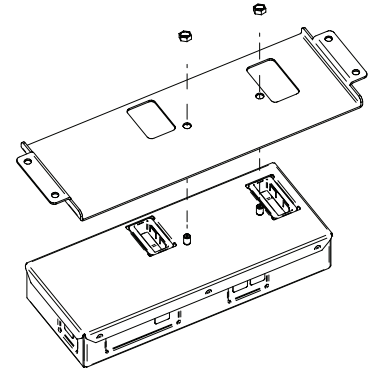


Fix driver mounting plate to driver using the nuts provided. (Fixez la plaque de l'alimentation à l'alimentation avec les écrous inclus)

④

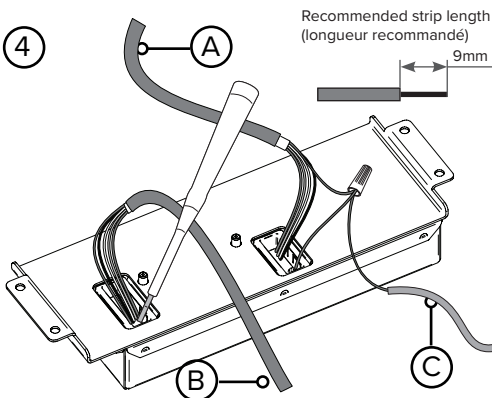


Licensed electrician to terminate Mains Power to Driver Input (A), DC output from Driver to pendant (B), and ground connections from canopy to ground main input (C). Driver schematics on p. 17, 18. (Connectez l'alimentation principale à l'entrée C.A. (A), la sortie C.C. de l'alimentation à la luminaire (B), et les connections du mise à terre du pavillon à la mise à terre de l'alimentation (C). Schémas électriques à la p. 17, 18.)

⑤

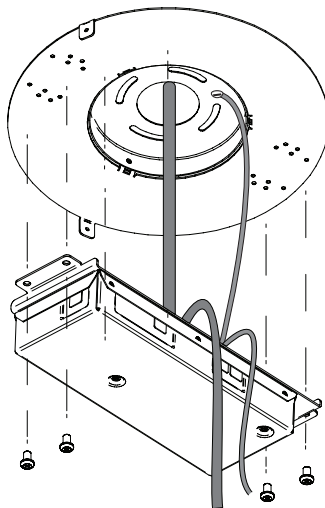


Fix Driver to Canopy Base using the screws provided. (Fixez la base du pavillon avec la quincaillerie de montage)

⑥

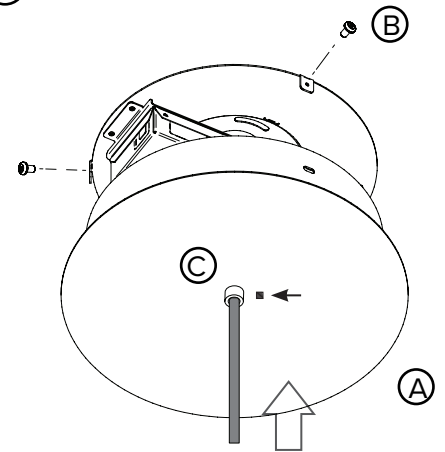

Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressérrez les vis (B) et ajustez la bride de décharge (C).)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

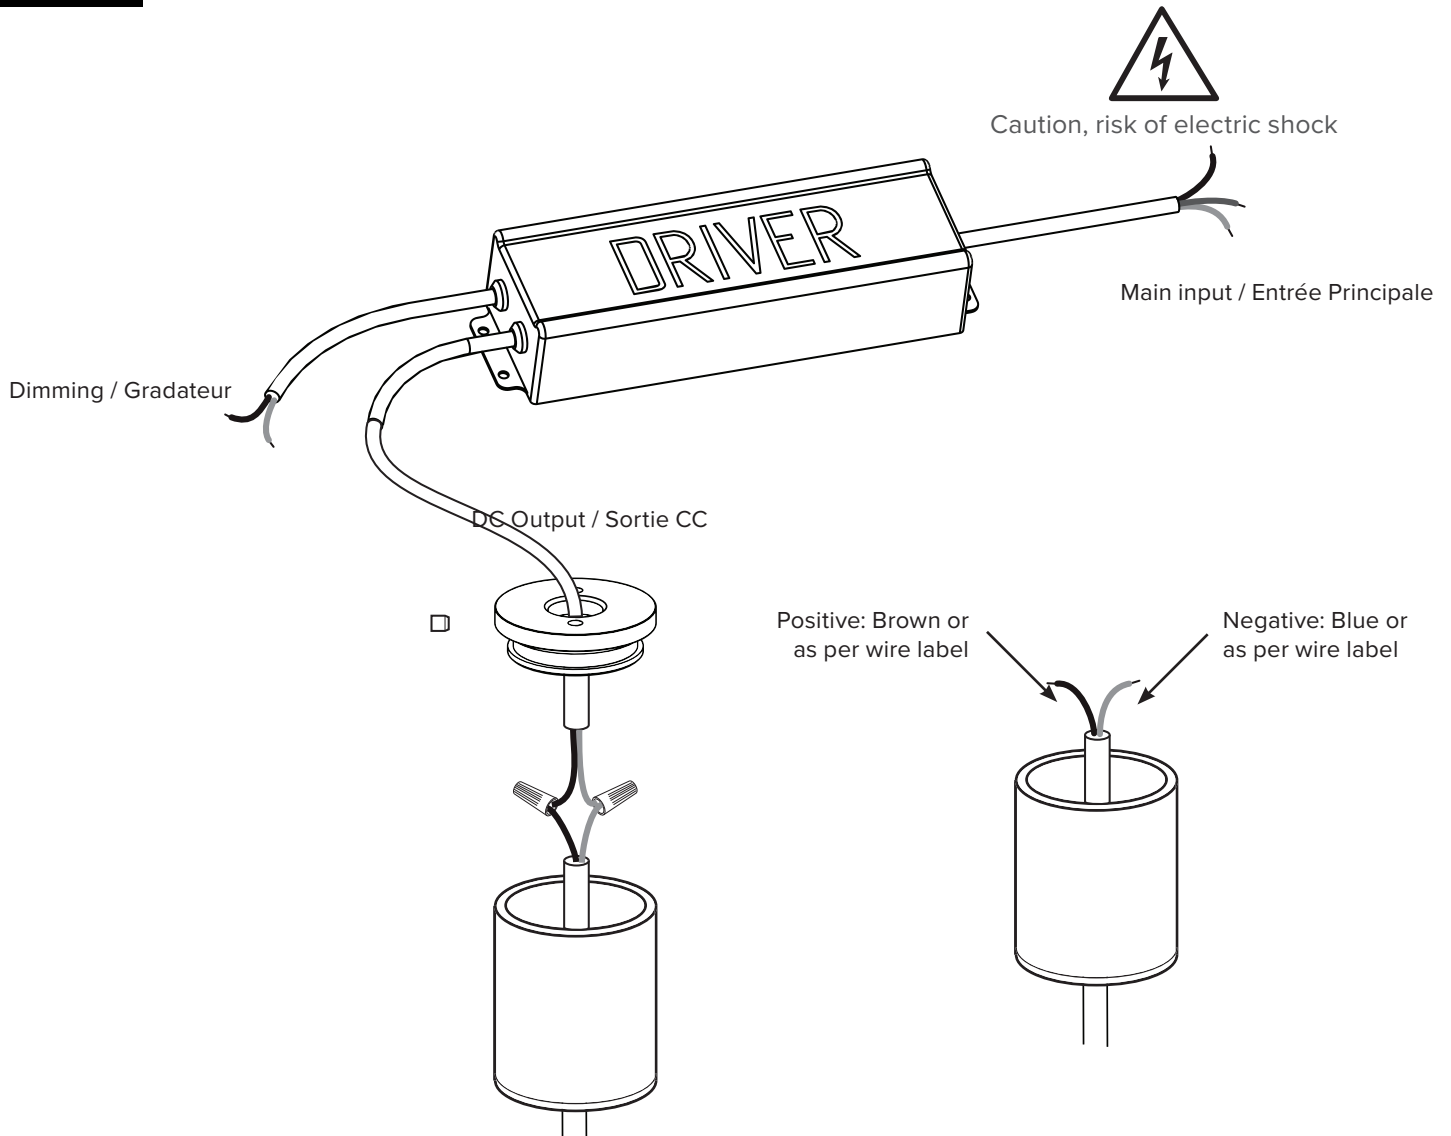

Wire Colors / Couleurs des câbles

- Active/Phase: Brown/Marron
- Neutral/Neutre: Blue/Bleu
- Earth/Mise à Terre: Green-Yellow/Vert-Jaune
- Dimming Positive (+)/Gradateur Positif(+): As per wire label/selon l'etiquette du câble
- Dimming Negative (-)/Gradateur Negatif(-): As per wire label/selon l'etiquette du câble
- Output(+)/Sortie(+): Red or as per wire label/Rouge ou selon l'etiquette du câble
- Output(-)/Sortie(-): Black or as per wire label/Noir ou selon l'etiquette du câble


⚠ This product is to be installed by a qualified electrician only. Ce produit doit être installé par un électricien autorisé

⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0


- ⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate. Il est recommandé de choisir le type de fixations avant de commencer l'installation).
- ⚠ This product is to be installed by a qualified electrician only. Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé).
- ⚠ If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- ⚠ Caution, risk of electric shock. Basic insulation maintained between LV supply and control conductors
- ⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

①

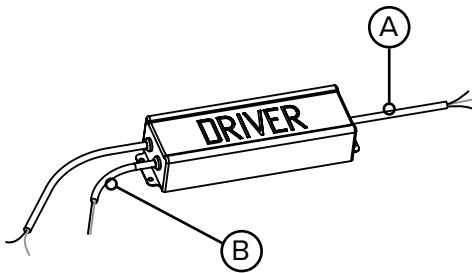


Terminate Mains Power (A) / Dimming Control (B) to remotely mounted LED driver. Driver schematics on page 16. (Connectez l'alimentation principale (A) / le control du gradateur (B) avec le bloc d'alimentation. Schémas électriques à la page 16)

②




Hang shade from ceiling using mounting hardware provided. See page 15 for additional detail. (Suspendez l'abat-jour avec la quincaillerie de montage. Plus info á la page 15)

③

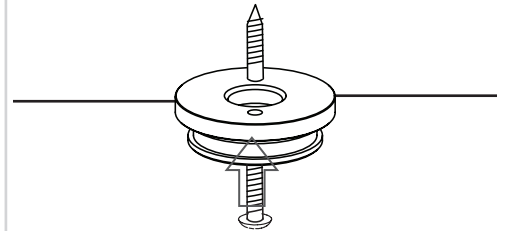


Mount canopy base to ceiling. (Fixez le pavillon en position)

④

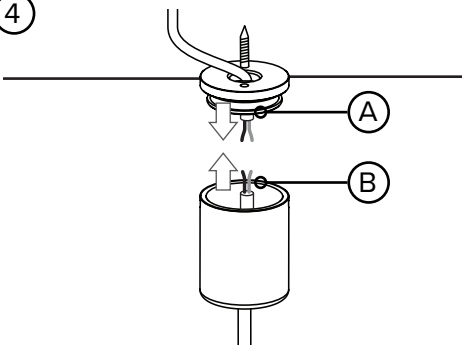


Insert DC output (A) from Driver into canopy base, then insert the DC input (B) from pendant or light source through canopy cover. (Insérez la sortie CC (A) de l'alimentation à travers de la base du pavillon. Après, insérez l'entrée CC du luminaire à travers la plaque de montage du pavillon)

⑤

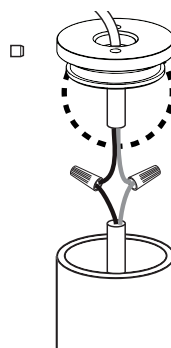

Terminate DC input to DC output inside canopy. (Connectez l'entrée CC et la sortie CC à l'intérieur du pavillon)

⑥

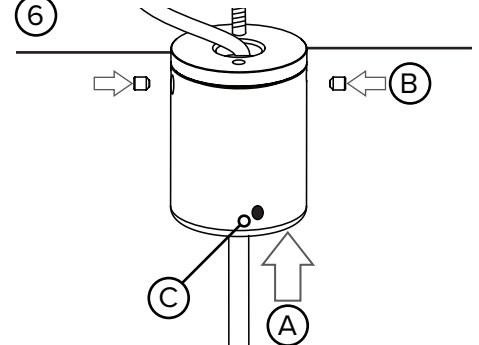

Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressérerez les vis (B) et ajuster la bride de décharge (C).)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate. Il est recommandé de choisir le type de fixations avant de commencer l'installation).


⚠ This product is to be installed by a qualified electrician only. Tous les travaux électriques et d'installation doivent être effectués par un électricien autorisé).

⚠ If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

⚠ Caution, risk of electric shock. Basic insulation maintained between LV supply and control conductors


⚠ Power supply must be isolated prior to connection or disconnection of cables. Failure to do so will result in damage to the luminaire components. (L'alimentation doit être isolée avant la connexion ou la déconnexion des câbles. Le non-respect de cette consigne peut endommager les composants électriques.)

①

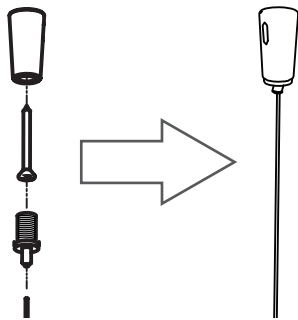


Hang shade from ceiling using mounting hardware provided. See page 15 for additional detail. (Suspendez l'abat-jour avec la quincaillerie de montage. Plus info à la page 15)

②

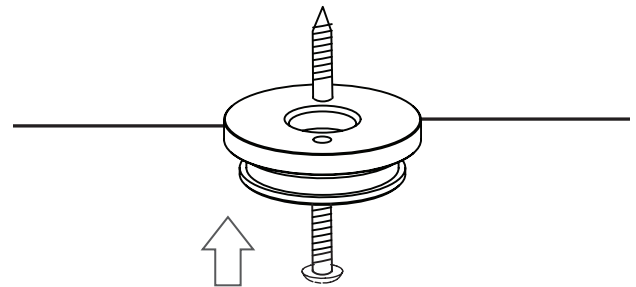


Mount canopy base to ceiling. (Fixez le pavillon en position)

④

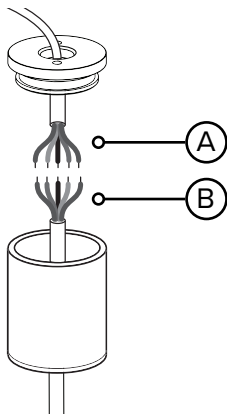


Insert Mains (A) into canopy base, then insert the DC input (B) from pendant through canopy cover. Driver schematics on pg. 16 (Insérez l'alimentation principale à travers de la base du pavillon, en suivant, insérez l'entrée C.C. (B) de la luminaire à travers la plaque du pavillon. Schémas électriques à la page 16.)

⑤

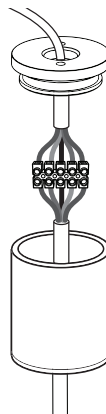

Licensed electrician to terminate Mains Power to DC input, and ground connection from Mains to canopy base. (Connectez l'alimentation principale à l'entrée C.C. et la mise à terre de l'alimentation principale à la mise à terre du pavillon)

⑥

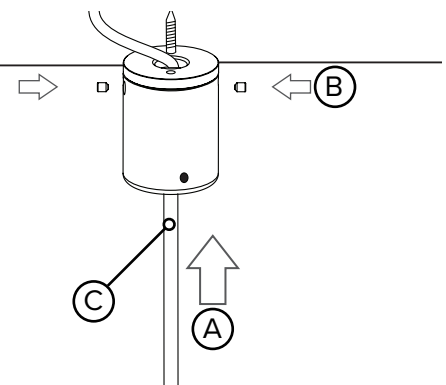


Place canopy cover over canopy base (A), then fasten grub screws (B) and cable strain relief (C). (Levez le pavillon en position (A), ressérez les vis (B) et ajustez la bride de décharge (C).)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0

BRACE INSTALLATION INSTRUCTIONS (LARGE ONLY)

1. Place supplied braces over sheet metal tabs
2. Ensure braces overlap one another at frame arms
3. Use pliers to twist tabs 90° to secure braces.

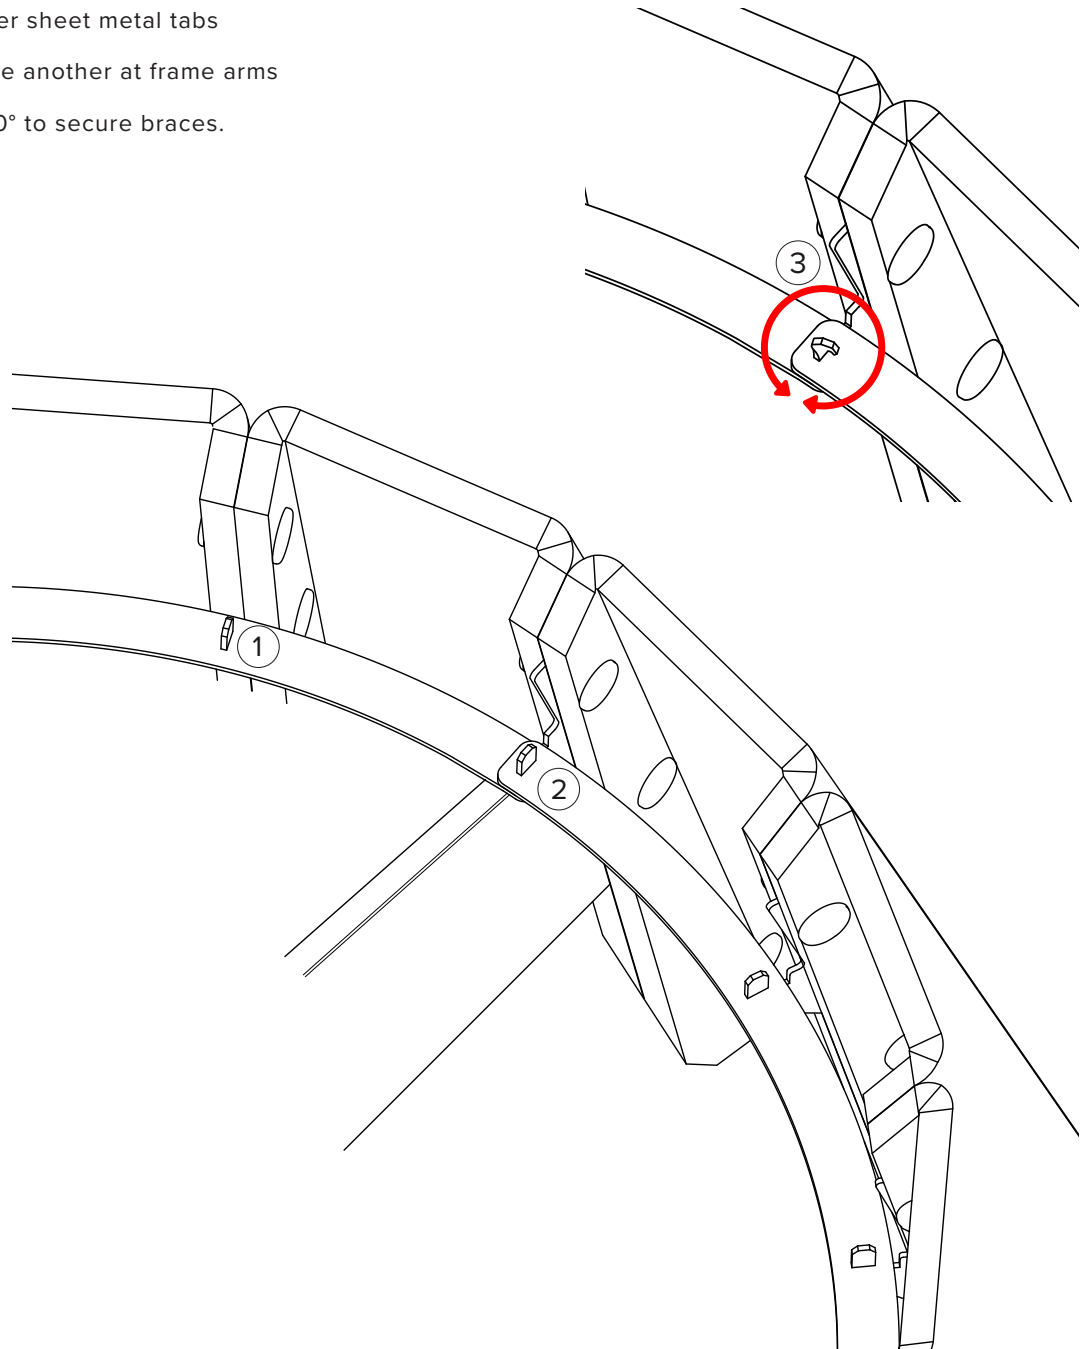

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. October 2021. Luxxbox-Acoustic-Lighting-Install-Instructions-v4.0