

## **Elevation**


**It's time to get moving.**

**The Elevation height-adjustable workstation and table system is here to expand your possibilities, with the flexibility to suit every requirement.**

## Elevation


Electric

6–9




Manual


10–12



Accessories

13–16



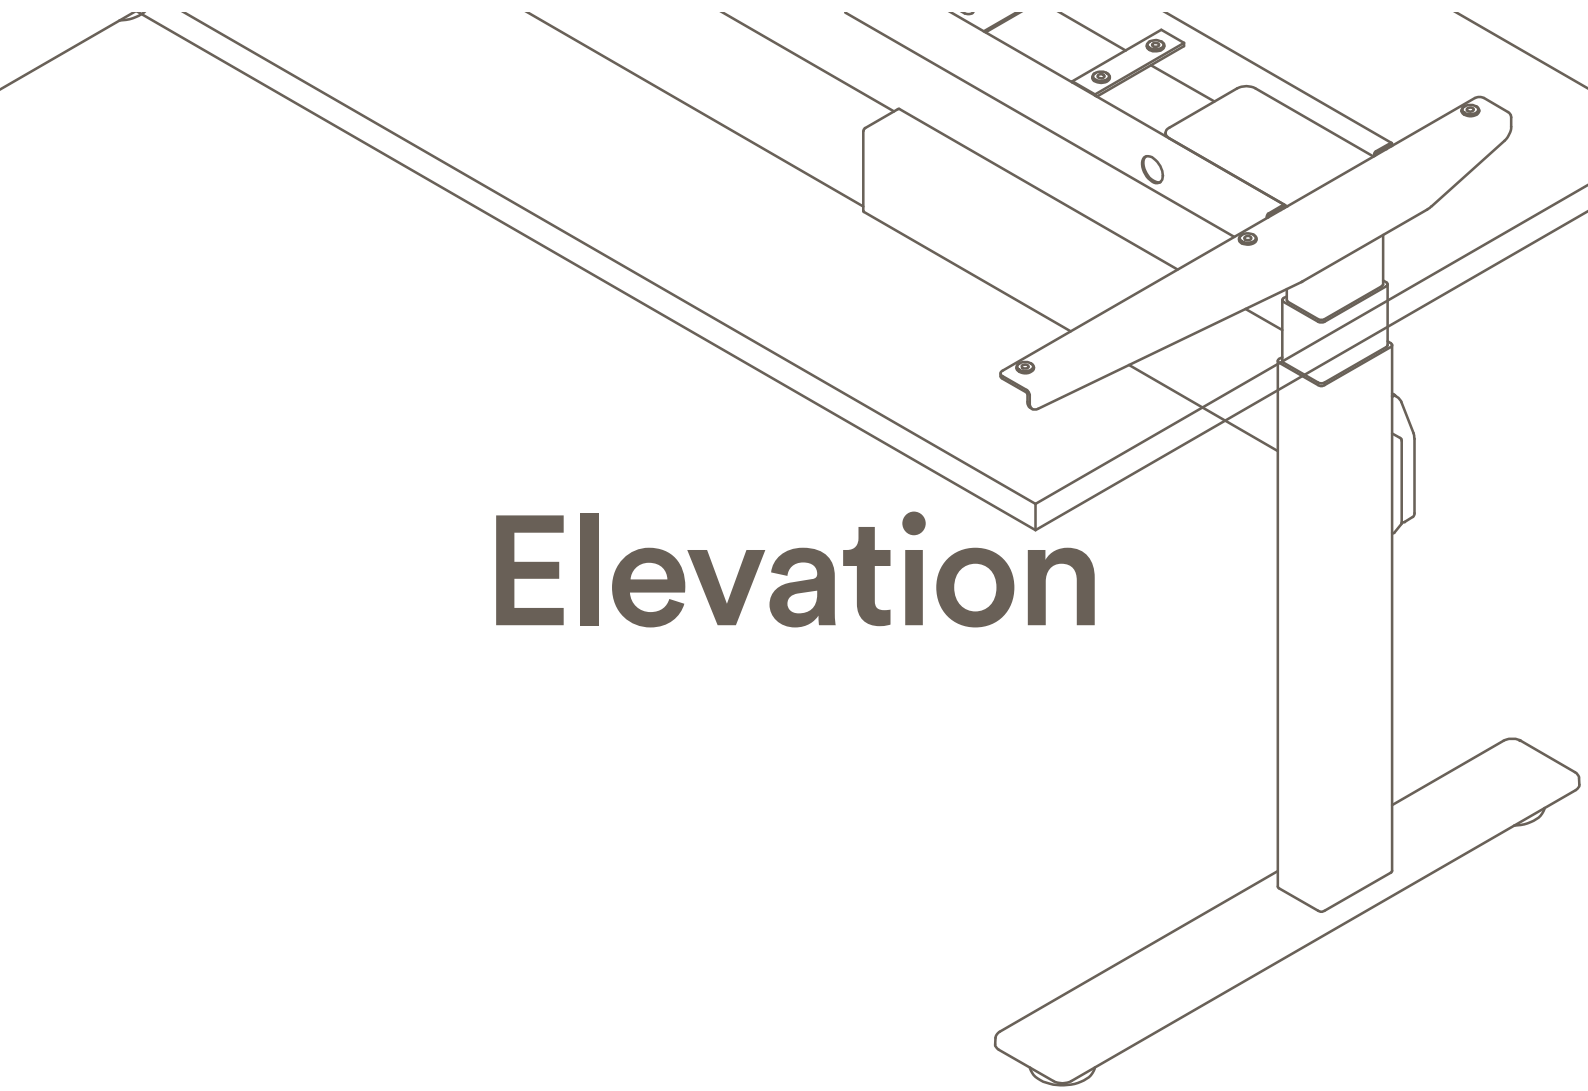

# Elevation

# Elevation

## General Features

---

### Dimensions

Minimum Height	625mm
Maximum Height (to underside of worktop)	1275mm

---


### Function

- 4x Height Presets (handset programmable)

---

### Warranty

Electric Frame	10yrs
Electrical Components	5yrs

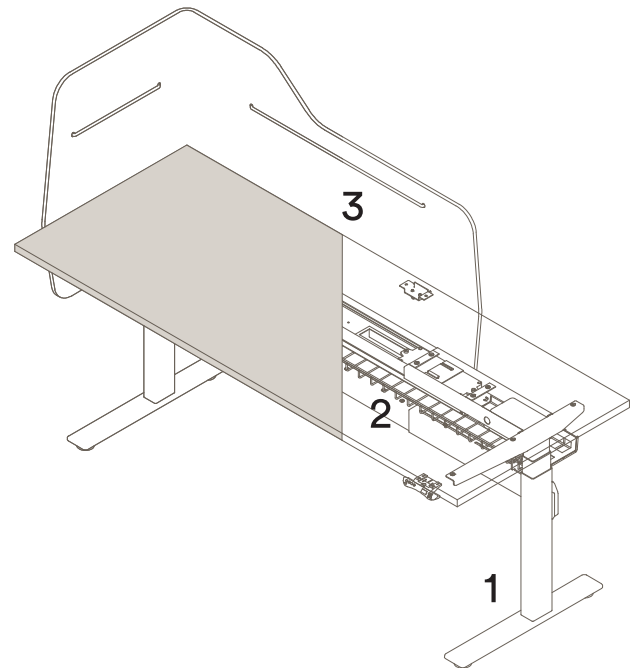

Colours are representative only, please check with your Thinking Works consultant to view samples of any specific colour.

# Elevation Finishes

## 1. Frame Powdercoat

Elevation steel and aluminium frame is available in Black, Silver and White powdercoat.




## 2. Cable Basket

Our cable management basket comes standard as Black powdercoat.



## 3. Acoustic Wrap Screen

Our unique mobile and reversible wrap screen is available in Light Grey and Dark Grey acoustic panel.

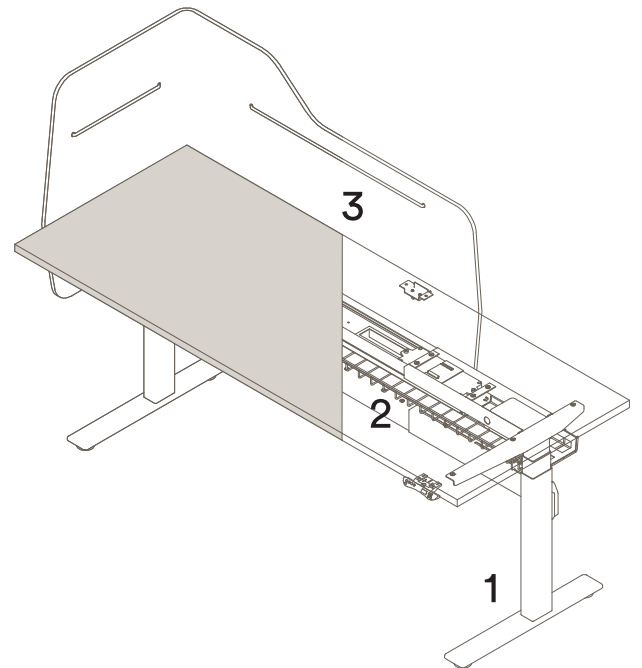

Colours are representative only, please check with your Thinking Works consultant to view samples of any specific colour.

# Electric Single Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Foot

- a. White
- b. Silver
- c. Black

### Frame Finish

Powdercoat Steel Frame

- a. White
- b. Silver
- c. Black

### Controller Finish

Black Control Box & Handset

### Additional Frame Cross-Beam

Optional for Electric Single Sided 1200-2100mmWP

Optional for Electric 90/120deg 1400-1800mmWP

Required for Electric 90/120deg 1801-2100mmWP

### Height Range

600mm to 1250mm to underside of worktop

### Travel Speed

35/mm per second

### Glide Adjustment




Plus or minus 5mm

### Handset


4 programmable height settings with electronic display

Maximum inc. worktop	100kg
Maximum Point Load	30kg
Seats	1


## E2S-1000 1pax

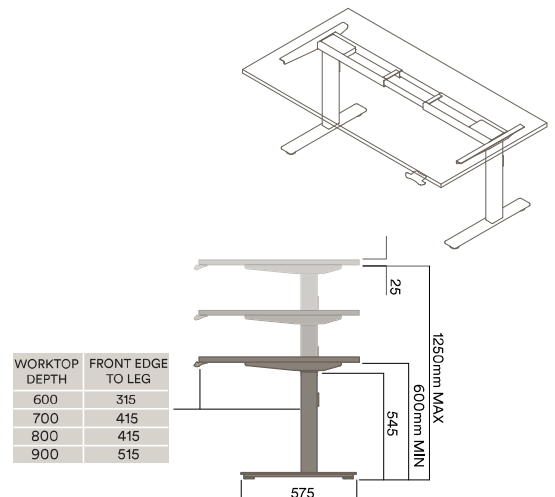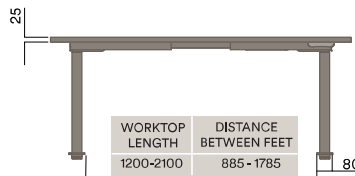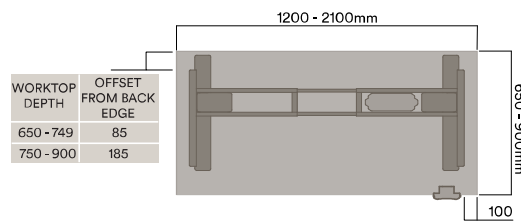

## E2S-1090 1pax 90deg



## E2S-1120 1pax 120deg

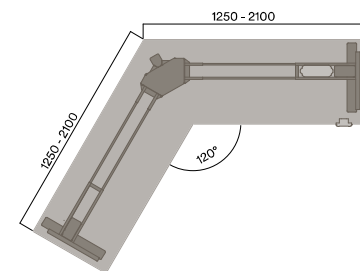

# Electric Double Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Foot  
 a. White  
 b. Silver  
 c. Black

### Frame Finish




Powdercoat Steel Frame

a. White  
 b. Silver  
 c. Black




### Controller Finish

Black Control Box & Handset

E2S-1050 Meeting Table

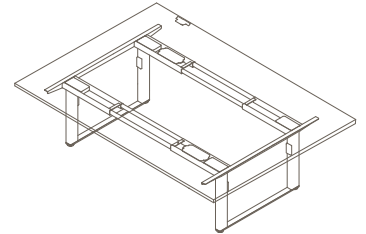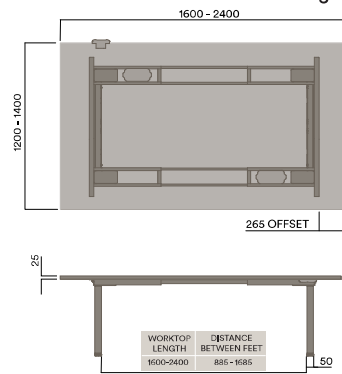

E2S-2000 2pax H-Frame

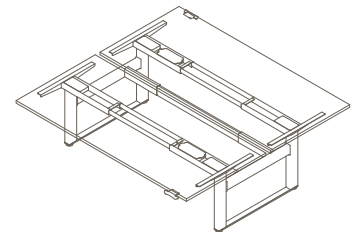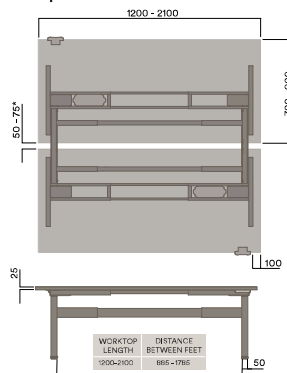

**Height Range**  
 600mm to 1250mm to underside of worktop

**Travel Speed**  
 35/mm per second

**Glide Adjustment**  
 Plus or minus 5mm

**Handset**  
 4 programmable height settings with electronic display

\*Gap between worktop depending on screen thickness

Maximum inc. worktop 150kg  
 Maximum Point Load 30kg  
 Seats 2

# Electric Double Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Aluminium Foot  
 a. White  
 b. Silver  
 c. Black

### Frame Finish

Powdercoat Steel Frame  
 a. White  
 b. Silver  
 c. Black

### Controller Finish

Black Control Box & Handset

### Height Range

600mm to 1250mm to underside of worktop

### Travel Speed

35/mm per second

### Glide Adjustment

Plus or minus 5mm

### Handset




4 programmable height settings with electronic display

\*Gap between worktop depending on screen thickness

Maximum inc. worktop	150kg
Maximum Point Load	30kg
Seats	3-4




E2S-3000 3pax

120deg H-Frame

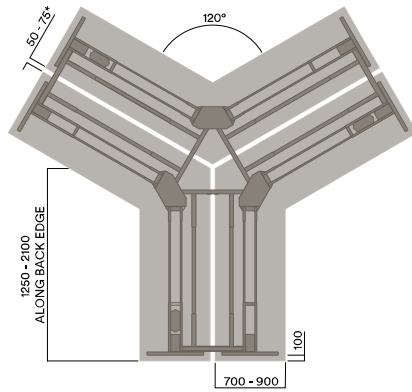

E2S-4000 4pax

90deg H-Frame

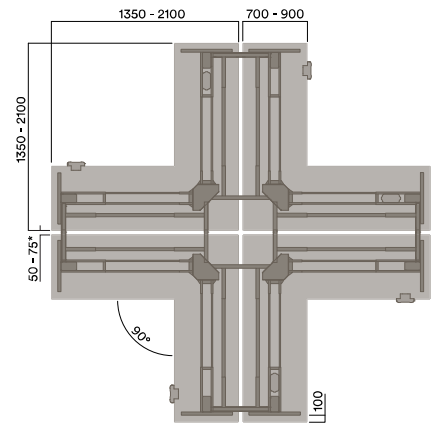




# Electric Safety Features

## Impact Stop

- Impact Stop system minimises damage to Electric Height Adjustable frames from contact with objects obstructing the path of movement
- Impact Stop initiates while frame is lowering or raising, when 1 second of resistance from an obstruction is detected.
- When resistance is detected, desk will automatically stop then move 50mm in opposite direction in order to clear obstruction.

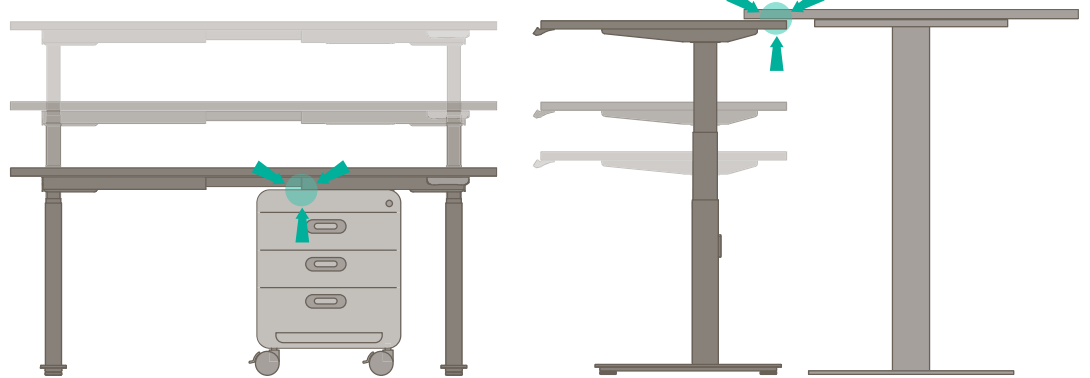

# Manual Single Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Foot

- a. White
- b. Silver
- c. Black

### Frame Finish

Powdercoat Steel Frame

- a. White
- b. Silver
- c. Black

### Winder Finish

Black Plastic Winder Handle

### Height Range

585mm to 885mm to underside of worktop

### Travel

Winder (left or right position)

OR

Technician Adjustable (Winder frame with handle removed)

### Travel Speed





2.5/mm per turn, 145 turns from 585mm to 885mm

### Glide Adjustment


Plus or minus 5mm

Maximum inc. worktop 100kg  
Maximum Point Load 30kg  
Seats 1


## E2-1000 1pax

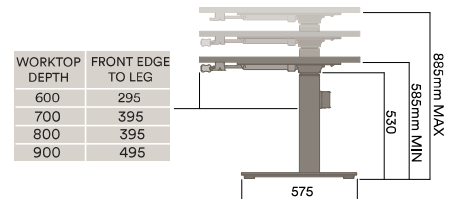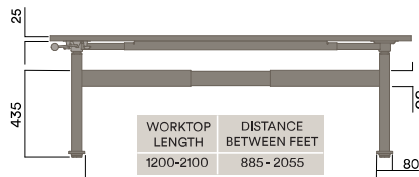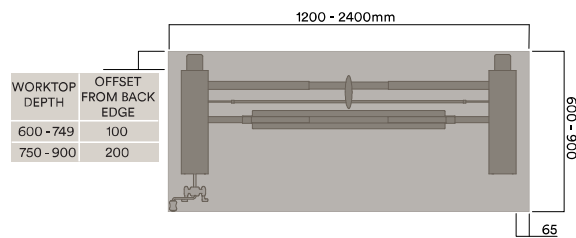

## E2-1090 1pax 90deg



## E2-1120 1pax 120deg



# Manual Double Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Aluminium Foot

- a. White
- b. Silver
- c. Black

### Frame Finish

Powdercoat Steel Frame

- a. White
- b. Silver
- c. Black




### Winder Finish

Plastic Winder Handle

- a. Black



## E2-2000 2pax

## H-Frame

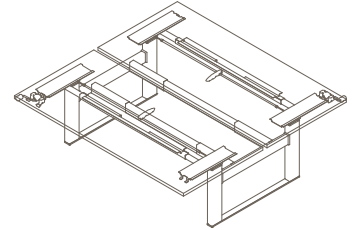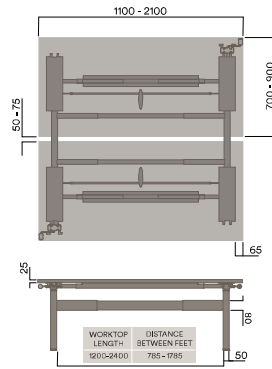

## 4 pax Configuration - 2x E2-2000

## 6 pax Configuration - 3x E2-2000

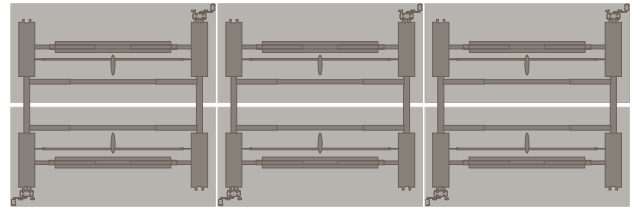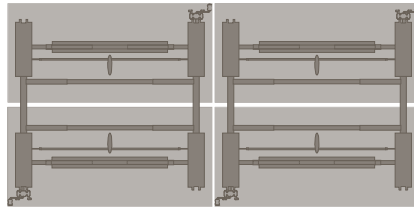

### Height Range

585mm to 885mm to underside of worktop

### Travel

Winder (left or right position)

OR

Technician Adjustable (Winder frame with handle removed)

### Travel Speed

2.5/mm per turn, 145 turns from 585mm to 885mm

### Glide Adjustment

Plus or minus 5mm

Maximum inc. worktop	100kg
Maximum Point Load	30kg
Seats	2

# Manual Double Sided

## Materials Information

### Leg & Foot Finish

Powdercoat Steel Leg & Aluminium Foot

- a. White
- b. Silver
- c. Black

### Frame Finish

Powdercoat Steel Frame

- a. White
- b. Silver
- c. Black

### Winder Finish

Plastic Winder Handle

- a. Black

### Height Range

585mm to 885mm to underside of worktop

### Travel

Winder (left or right position)

OR

Technician Adjustable (Winder frame with handle removed)

### Travel Speed

2.5/mm per turn, 145 turns from 585mm to 885mm


### Glide Adjustment

Plus or minus 5mm

Maximum inc. worktop	100kg
Maximum Point Load	30kg
Seats	3-4


E2-3000 3pax

120deg H-Frame

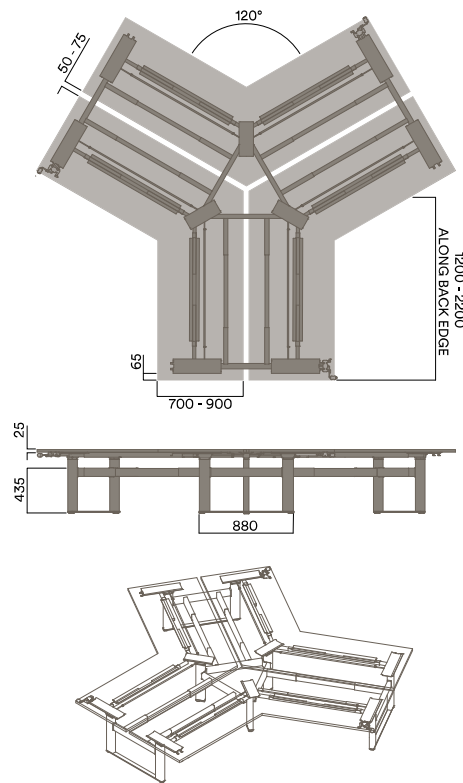

E2-4000 4pax

90deg H-Frame

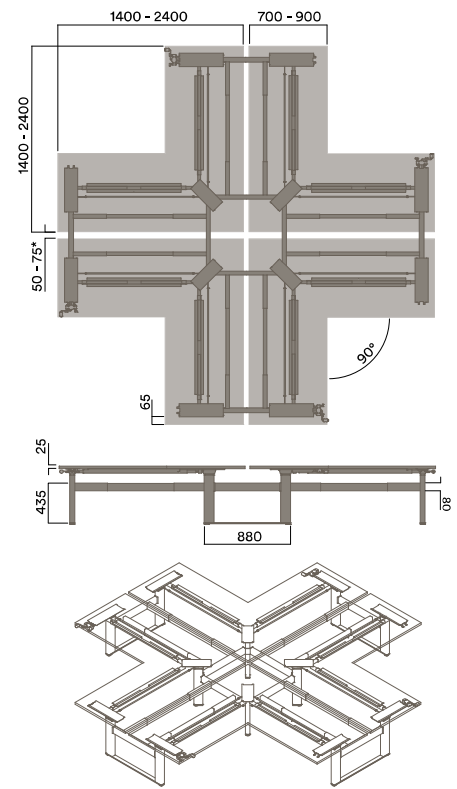

# Accessories

## Cable Management

### Materials Information

#### Cable Basket

Wire Cable Basket

- a. Black Powdercoat

Steel Segregation Gutter/Worktop Brackets

- a. Black Powdercoat

Black Plastic Basket Hook


#### Cross Beam

Powdercoat Steel Cross Beam


- a. White - to match frame
- b. Silver - to match frame
- c. Black - to match frame

E2-1100 Series

Mobile Single Sided Cable Basket


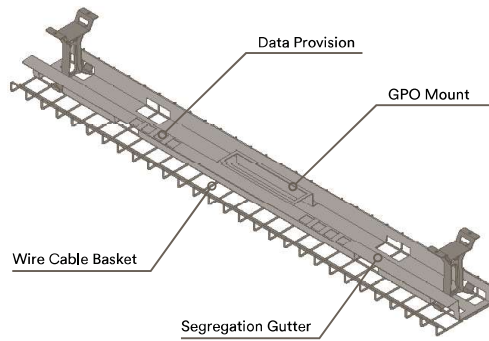


Worktop Mount Bracket

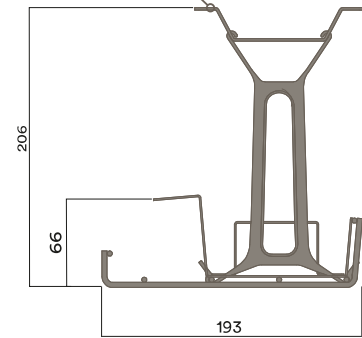

E2-1100 Series

Static Single Sided Cable Basket

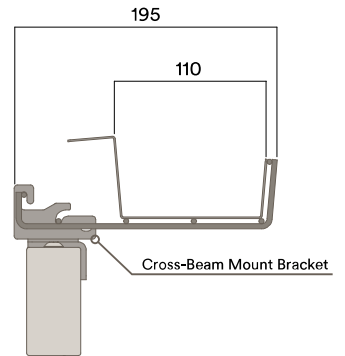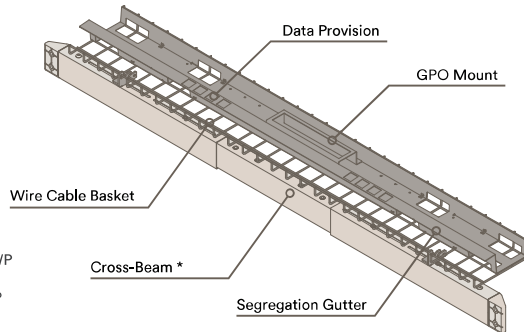

#### \*Additional Frame Cross-Beam

Optional for Electric Single Sided 1200-2100mmWP

Optional for Electric 90/120deg 1400-1800mmWP  
Required for Electric 90/120deg 1801-2100mmWP

Required for Static Cable Basket Configuration

# Accessories

## Cable Management

### Materials Information

#### Cable Basket

Wire Cable Basket

a. Black Powdercoat

Steel Segregation Gutter/Worktop Brackets

a. Black Powdercoat



Black Plastic Basket Hook

#### Cable Umbilical

Black Plastic Umbilical



E2-2100 Series

Static Double Sided Cable Basket

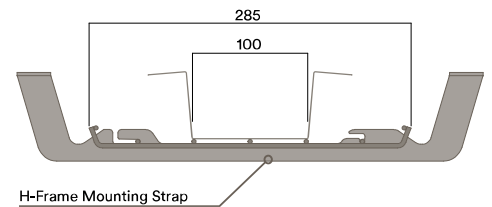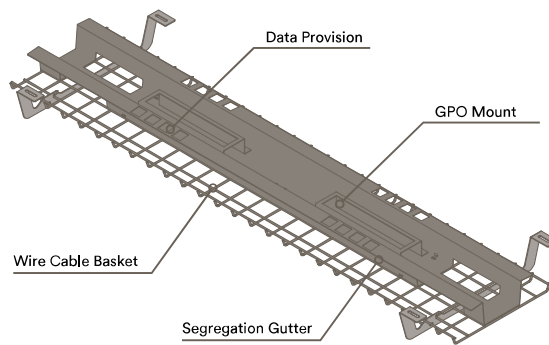


WSA-E-1120

900mm Cable Umbilical

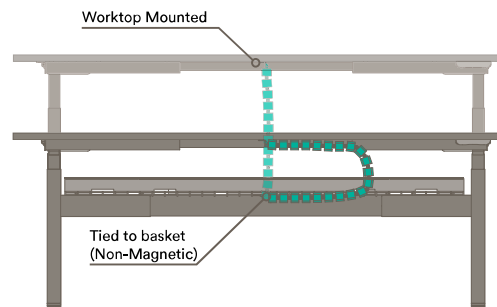

**Umbilical Capacity**  
 4 × 12mm 20amp power cable  
 12 × 6mm Cat 5 / Cat 6 data cable



# Accessories

## Generic Screen Brackets

### Materials Information

#### Screen Bracket Kit

Powdercoat Steel Screen Brackets


- a. White - to match frame
- b. Silver - to match frame
- c. Black - to match frame

### E2-6050 Series

1pax Single Sided Config.




WORKTOP DEPTH	SCREEN OFFSET FROM FRAME
650-749	100
750-900	200




### Screen Bracket Kits


1x Screen Config. - 1pax 90deg




2x Screen Config. - 1pax 90deg



1x Screen Config. - 1pax 120deg




2x Screen Config. - 1pax 90deg





### E2-6060

SCREEN LENGTH = WORKPOINT LENGTH + 30mm\*

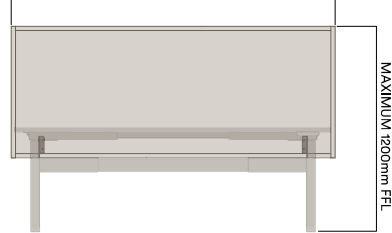

### H-Frame Screen Brackets

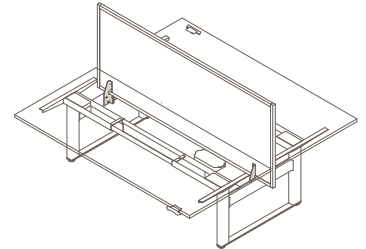

\*30mm is minimum recommended spacing between worktops for adequate "finger gap"

# Accessories

## Wrap Screens

### Materials Information

#### Wrap Screen

Wrap Screen Acoustic Panel

- a. Light Grey
- b. Dark Grey




#### Wrap Screen Rod & Bracket

Powdercoat Steel Screen Brackets

- a. Light Grey
- b. Dark Grey (to match Acoustic Panel)
- c. Other Colour

E2-6061

Single Sided Acoustic Screen

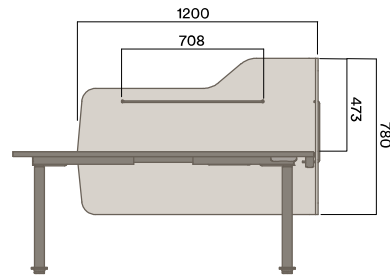

E2-6062

Back to Back Acoustic Screen

