# **ENVIRONMENTAL PRODUCT DECLARATION**



in accordance with ISO 14025

Owner of the declaration Program holder Declaration number Issue date Valid to

Flokk AS The Norwegian EPD Foundation NEPD00039E Rev. 1 17.12.2014 17.12.2019

# HÅG H09 Inspiration 9230

# Flokk AS

Owner of the declaration:







# **General information**

Product	
HÅG H09	In

HÅG H09 Inspiration 9230

Owner of the declaration:

Ø[\\ AS

Contact person: OĒ(^Á/OÃ Ē Ē ^••^|
Phone: +47 JÌ ÁG ÁÌ ÁH€
E-mail: æ(^È ^••^|○ √ | \\ÈX| {

**General information** 

The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo

Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

Manufacturer

Ø[\\ AS

**Declaration number:** 

NEPD00039E Rev. 1

Place of production:

7366 Røros, Norway

This declaration is based on Product Category Rules:

PCR for Seating Solution, NPCR 003 extended version 2013, in accordance with recommendations by the Norwegian EPD Foundation

Management system:

ISO 14001, Certificate No.2010-SKM-AR-1487 from the Accredited Unit: DNV Certification AB, Sweden.

Declared unit:

Org. No:

No 928 902 749

Declared unit with option:

17.12.2014

Valid to:

Production of one seating solution provided and

maintained for a period of 15 years.

17.12.2019

The EPD has been worked out by:

Østfoldforskning AS

**Functional unit:** 

S





Comparability:

EPD from programmes other than the Norwegian EPD Foundation may not be comparable

Year of study:

2014

Verification:

Approved

Senior Research Scientist, Cecilia Askham (Independent verifier approved by EPD Norway)

Dagfinn Malnes Managing Director of EPD-Norway

Functional unit:

Production of one seating solution provided and maintained for a period of 15 years.

Key environmental indicators (A1-A3)	Unit	Cradle to gate A1 - A3
Global warming	kg CO <sub>2</sub> eqv	86
Total energy use	MJ	1083
Substances from the REACH Candidate list	*	
Amount of recycled materials	%	38 %

<sup>\*</sup> The product contains no substanses from the REACH Candidate list or the Norwegian priority list



# **Product**

#### **Product description:**

HÅG H09 Inspiration is based on the unique HÅG movement philosophy and ensures great circulation, in addition to being a comfortable collaborator. HÅG H09 Inspiration has a light and desirable expression. When you sit down, you notice how the transparent textile provides freedom of movement whilst the chair remains rock solid. The chair's back, which is clothed in the transparent textile, is available in dark and light versions.

Materials	kg	%
Steel	7,3	35 %
Aluminium	7,6	36 %
Plastics	5,4	26 %
Textile	0,4	2 %
Various	0,4	2 %
Total product	21,1	100 %
Cardboard (packaging)	2,4	
Total product and packaging	23,5	

#### **Technical data:**

Total weight: 21,1 kg (23,5 kg with packaging)

More information:


http://www.hag-uk.co.uk/products/hag-h09/hag-h09-excellence-9320/

#### Market:

Europe and USA

#### Reference service life:

15 years

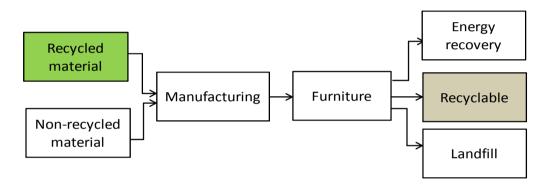

Materials	Recycled share for each material	Recycled amount	Recycled share in product	Recyclable share for each material	Recyclable amount	Recyclable share in product
Unit	%	kg	%	%	kg	%
Steel	32 %	2,4	10 %	100 %	7,3	1 %
Aluminium	75 %	5,7	24 %	100 %	7,6	30 %
Polypropylene	0 %	0,0	0 %	100 %	1,3	9 %
Polyurethane	0 %	0,0	0 %	0 %	0,0	0 %
Other plastic	0 %	0,0	0 %	100 %	3,0	48 %
Textile	0 %	0,0	0 %	100 %	0,4	3 %
Varnish	0 %	0,0	0 %	0 %	0,0	0 %
Not included	0 %	0,0	0 %	0 %	0,0	0 %
Total product	-	8,0	38 %	-	19,6	93 %
Packaging (carboard)	75 %	1,2		100 %	1,6	
Total product and packaging		9,2	39 %	-	21,2	90 %

In manufacture, about 39% of the total mass of the chair and its packaging is recycled material. At the end of the chair's life, about 90% of its total mass will consist of materials that can be recycled.




#### LCA: Calculation rules

#### **Functional unit:**

Production of one seating solution provided and maintained for a period of 15 years.

#### System boundary:

Life cycle stages included are described in figure and through the corresponding letter and number designations in the declaration (see figure below).

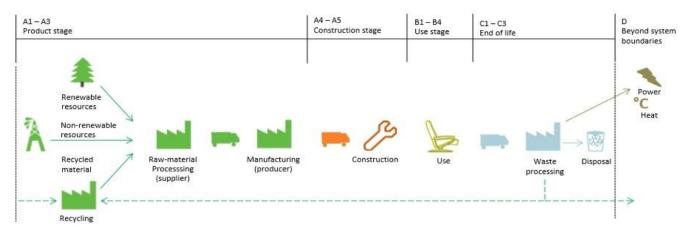

The seating solution components are assembled at SBSeating's facility in Røros.

#### Data quality:

Specific data from suppliers and manufacturer 2011/2012 are used in the EPD analysis. Database data from Ecoinvent 3 is used as the basis for raw material and energy carrier production.

#### **Cut-off criteria:**

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials and substances

#### Allocation:

- Where virgin materials are used, emissions and energy consumption connected with extraction and production are included
- Where recycled materials are used in the product, emissions and energy consumption related to the recycling process are included
- Emissions from incineration of waste are allocated to the product system that uses the recovered energy. This is a deviation from the PCR for Ecoinvent processes, where emissions from incineration are allocated to the product system in which the waste arises.

Emissions from incineration of waste without energy recovery are allocated to the production system where the waste arises.

#### **Additional information**

According to the PCR the output should include both impact and the largest emissions (by mass) to air and water. Because of the format of the EPD the largest emissions are not presented.

The methods for calculating the environmental impact are IPCC 2007 for global warming and CML 2001 for other impact categories.

Material recycling at end of life (D) is not within the system boundaries, but as a scenario. The avoided emissions from replaced virgin material are included in D.

### LCA: Scenarios and additional technical information

Transportation to an average customer in Copenhagen is 1000 km (A4). The use stage is represented by a scenario and includes vacuum cleaning of textiles once a month. The PCR does not provide detailed guidelines for what should be included in the use stage. In the end of life stage, the transport distance for waste to waste processing is 72 km (C1).

The reuse, recovery and recycling stage is beyond the system boundaries (D). It is assumed that the chair is dismantled and the materials recycled or combusted according to the general Norwegian treatment of industrial waste. This calculation includes CO2 emissions and energy only (C1-D). Disassembly is a manual process with no impacts on the results of the LCA and is therefore not included. The transport distance to reuse, recovery or recycling varies for each material, but the average distance is 373 km.



HÅG · RH · BMA · OFFECCT · RBM

Beyond the system boundaries

# **LCA: Results**

The following information describes the scenarios in the different modules of the EPD.

System boundaries (X=included MND=modul not declared MNR=modul not relevant)

Cystem boundaries (X moldaed, MiAD modal not declared, MiAT modal not relevant)											
Product stage			Construc	ction stage		Use s	stage	End of life			
Raw materials	Transport	Manufacturing	Transport	Construction	Maintenance	Repair	Replacement	Operational energy use	Transport	Waste Processing	Disposal
A1	A2	A3	A4	A5	B1	B2	В3	B4	C1	C2	C3
Х	Х	Х	Х	MNR	х	MNR	MNR	MNR	Х	Х	Х

Environmental impact												
Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3		D
GWP	80	1,91	4,27	86	3,18	6,14E-03	1,78	14	0,08	16		-12
ODP	4,27E-05	1,25E-07	1,85E-07	4,30E-05	2,07E-07	1,89E-10						-2,38E-07
POCP	3,00E-02	2,04E-04	9,10E-04	3,11E-02	2,29E-04	1,16E-06						-2,62E-03
AP	0,16	1,52E-03	5,49E-03	0,16	2,34E-03	5,04E-06						-8,75E-03
EP	0,48	8,11E-03	1,47E-02	0,50	1,07E-02	3,44E-05						-4,08E-02
ADPM*	6,71E-04	8,59E-09	6,44E-06	6,78E-04	1,46E-08	2,04E-08						-6,16E-06
ADPE	1058	27	82	1167	44	8,20E-02	29	62	2,01	93		-286
*Some processes	included an	e based on	data from F	colnvent 3.0	1 which is	lacking da	ta for renev	vable resour	ces. The co	orrect numb	er of AF	PM in the

table above and RPEE, RPEM and TPE in the table below may be higher. See referance [5] for details. The lack of data will be addressed in a new version of Ecoinvent 3, which not was available when this declaration was carried out.

GWP Global warming potential (kg CO2-eqv.); ODP Depletion potential of the stratospheric ozone layer (kg CFC11-eqv.); POCP Formation potential of tropospheric photochemical oxidants (kg C2H4-eqv.); AP Acidification potential of land and water (kg SO2-eqv.); EP Eutrophication potential (kg PO4-3eqv.); ADPM Abiotic depletion potential for non fossil resources (kg Sb -eqv.); ADPE Abiotic depletion potential for fossil resources (MJ)

Resource use**												
Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3		D
RPEE*	1,2E+01	0	1,6E-02	1,2E+01	0,0E+00	9,3E-02						-2,39E+00
RPEM*	4,5E+00	3,3E-03	1,1E+01	1,6E+01	5,3E-03	2,3E-05						-2,77E-01
TPE*	1,7E+01	3,3E-03	1,1E+01	2,8E+01	5,3E-03	9,3E-02						-2,66E+00
NRPE	1,0E+03	2,7E+01	5,4E+01	1,1E+03	4,5E+01	7,9E-02						-2,91E+02
NRPM	2,4E+02	0	3,2E+01	2,7E+02	0,0E+00	9,0E-03						0
TRPE	1,2E+03	2,7E+01	8,6E+01	1,3E+03	4,5E+01	8,8E-02						-2,91E+02
SM	8,4E+00	0	1,2E+00	9,6E+00	0	2,8E-06						-5,56E+00
RSF	0	0	0	0	0	0						0
NRSF	-7,2E+00	0	-1,0E-01	-7,3E+00	0	4,0E-02						0
W	2,5E+00	5,1E-03	1,6E-01	2,6E+00	8,5E-03	4,6E-03						-4,41E+01
*See above	•							•				

<sup>\*\*</sup> Energy is given in MJ in accordance with recommandations in the Norwegian EPD progam.

RPEE Renewable primary energy resources used as energy carrier (MJ); RPEM Renwable primary energy resources used as raw materials (MJ); TPE Total use of renewable primary energy resources (MJ); NRPE Non renewable primary energy resources used as energy carrier (MJ); NRPM Non renewable primary energy resources used as materials (MJ); TRPE Total use of non renewable primary energy resources (MJ); SM Use of secondary materials (kg); RSF Use of renewable secondary fuels (MJ); NRSF Use of non renewable secondary fuels (MJ); W Use of net fresh water (m3)

End of life - Waste and Output flow												
Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3		D
HW	2,4E-02	1,9E-05	3,7E-04	2,4E-02	3,1E-05	5,8E-06						-2,87E-01
NHW	4,0E+01	1,6E-02	4,3E-01	4,1E+01	2,5E-02	7,6E-04			4,5E+00	4,5E+00		-6,66E-01
RW	0	0	0	0	0	0						0,00E+00
CR	0	0	0	0	0	0						0,00E+00
MR	3,3E-03	0,0E+00	1,3E+00	1,3E+00	0	0		1,5E+01		1,5E+01		0,00E+00
MER	0	0	3,2E-01	3,2E-01	0	0		3,7E+00		3,7E+00		0,00E+00
EEE	0	0	0	0	0	0				0,0E+00		0,00E+00
ETE	0	0	0	0	0	0				0,0E+00		1,16E+02

HW Hazardous waste disposed (kg); NHW Non hazardous waste disposed (kg), RW Radioactive waste disposed (kg); CR Components for reuse (kg); MR Materials for recycling (kg); MER Materials for energy recovery (kg); EEE Exported electric energy (MJ); ETE Exported thermal energy (MJ)



# **Specific Norwegian requirements**

#### **Electricity**

The following data from ecoinvent v3 (June 2012) for Norwegian production mix included import, low voltage is used; Energy/Electricity country mix/Low voltage/Market: Electricity, low voltage {NO}| market for | Alloc Def, U. Production of transmission lines, in addition to direct emissions and loss in grid are included. Characterisation factors stated in EN 15804:2012+A1:2013 are used. This gives following greenhouse gas emissions: 24 g CO2-eqv/kWh.

#### **Dangerous substances**

None of the following substances have been added to the product: Substances on the REACH Candidate list of substances of very high concern (of '16.06.2014) substances on the Norwegian Priority list (pr.17.06.2013) and substances that lead to the product being classified as hazardous waste. The chemical content of the product complies with regulatory levels as given in the Norwegian Product Regulations.

#### Indoor environment

http://productguide.ulenvironment.com/ProductDetail.aspx?productID=4566&BrandID=11

#### Climate declaration

Not relevant

# **Bibliography**

[1] NS-EN ISO 14025:2006, Environmental labels and declarations-Type III environmental declarations-Principles and procedures.

[2] NS-EN ISO 14044:2006, Environmental management - Life cycle assessment - Requirements and guidelines

[3] EN 15804:2012 + A1:2013 Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products

[4] PCR for seating solution: PRODUCT-CATEGORY RULES(PCR) for preparing an environmental product declaration (EPD) for Product Group "Seating solution". PCR 2008:NPCR 003. extended version

[5] Vold, M.; Livsløpsdata for 6 sitteløsninger fra Håg. Bakgrunnsdata for miljødeklarasjon (EPD), Østfoldforskning AS, OR 17.14 Fredrikstad.

[6] Raadal, H. L., Modahl, I. S., Lyng, K. A. (2009). Klimaregnskap for avfallshåndtering, Fase I og II. OR 18.09. ISBN: 978-82-7520-611-2, 82-7520-611-1

 $\label{lem:product} \begin{tabular}{l} [7] http://productguide.ulenvironment.com/ProductDetail.aspx?productID=4566\&BrandID=11.productDetail.aspx?productID=4566\&BrandID=11.productDetail.aspx?productID=4566\&BrandID=11.productDetail.aspx?productID=4566\&BrandID=11.productDetail.aspx?productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productDetail.aspx.productID=4566\&BrandID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID=11.productID$ 

and norge no	Program holder	Phone:	+47 23 08 80 00
epd-norge.no	The Norwegian EPD Foundation		
The Norwegian EPD Foundation	Post Box 5250 Majorstuen, 0303 Oslo	e-mail:	post@epd-norge.no
8	Norge	web	www.epd-norge.no
	Owner of the declaration	Phone:	+47 JÌÁGÍÁÌÍÁH€
l·lol:l:	Ø [ \\ AS	Fax	+47 22 59 59 59
	P.O Box 5055 majorstua, No 3001 Oslo	e-mail:	<u>info₿ [ @.վ[ \ \ .com</u>
HÅG · RH · BMA · OFFECCT · RBM	Contact person: Œ ^Á/@ã Ë ^••^	web	http://www{[\\.com/
-4.	Author of the Life Cycle Assessment	Phone:	+47 69 35 11 00
Ostfoldforskning	Østfoldforskning AS	Fax	+47 69 34 24 94
SUSTAINABLEINNOVATION	Stadion 4, 1671 Kråkerøy	e-mail:	post@ostfoldforskning.no
	Contact person: Mie Vold	web	www.ostfoldforskning.no