



## INSTRUCTIONS

For Assembling and Installing  
Pour l'assemblage et l'installation



### READ ALL SAFETY INSTRUCTIONS FIRST

Follow instructions carefully, failure to do so will void the warranty.

- Ensure installation complies with local law and applicable standards.
- Input voltage is 110V AC, 60 Hz.
- Ensure mains input is surge protected. Never make connections while power is connected.
- Do not make modifications or alter the product.
- Keep luminaire and connections clean and free of debris or moisture.
- It is the installer's responsibility that the installation is adequately sealed to avoid moisture ingress.

### LISEZ LES CONSIGNES DE SÉCURITÉ AVANT DE COMMENCER

Suivez attentivement les instructions, le non-respect de cette consigne annulera la garantie.

- Assurez-vous que l'installation est conforme à la législation locale et aux normes applicables.
- La tension d'entrée est de 110 V CA, 60 Hz.
- Assurez-vous que l'entrée secteur est protégée contre les surtensions. Ne faites jamais de connexions lorsque l'alimentation est connectée.
- N'apportez aucune modification au produit.
- Gardez le luminaire et les connexions propres et exempts de débris ou d'humidité.
- Il est de la responsabilité de l'installateur que l'installation soit correctement scellée pour éviter la pénétration d'humidité.

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. December 2022. LX-IL-v2.0



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM  
WWW.LUXXBOX.COM





## INSTRUCTIONS

For Assembling and Installing  
Pour l'assemblage et l'installation



### READ ALL SAFETY INSTRUCTIONS FIRST

- Follow instructions carefully, failure to do so will void the warranty.
- Ensure installation complies with local law and applicable standards.
- Mains voltage is 110-277V AC, 50-60 Hz for Universal (UNV) and 220-240V AC for Global (G).
- Ensure mains input is surge protected.
- Never make connections while mains power is connected.
- Do not make modifications or alter the product.
- Keep luminaire and connections clean and free of debris or moisture.
- It is the installer's responsibility that the installation is adequately sealed to avoid moisture ingress.
- For indoor dry environment use only.
- Never connect mains power directly to low voltage fixtures.
- Never connect mains voltage to low voltage red and black cables
- Never connect mains voltage to dimming wires (when applicable).

### LISEZ D'ABORD TOUTES LES INSTRUCTIONS DE SÉCURITÉ

- Suivre les instructions avec attention, le non-respect de cette consigne annulera la garantie.
- Assurez-vous que l'installation est conforme à la législation locale et aux normes applicables.
- La tension principale est 110-277 AC, 50-60 Hz pour Universal (UNV) et 220-240V AC pour Global (G).
- Assurez-vous que le câble d'alimentation est protégée contre les surtensions.
- N'effectuez jamais de connexions lorsque le câble d'alimentation est connectée.
- Ne faites pas de modifications ou n'altérez pas le produit.
- Gardez le luminaire et les connexions propres et exempts de débris ou d'humidité.
- Il est de la responsabilité de l'installateur que l'installation soit correctement scellée pour éviter la pénétration d'humidité.
- Pour une utilisation en intérieur sec uniquement.
- Ne connectez jamais le câble d'alimentation directement à des luminaires basse tension.
- Ne connectez jamais la tension secteur aux câbles rouge et noir basse tension.
- Ne connectez jamais la tension secteur aux fils de gradation (le cas échéant).

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. December 2022. LX-IL-v2.0



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM  
WWW.LUXXBOX.COM





ILLI

## INSTRUCTIONS


For Assembling and Installing | Pour l'assemblage et l'installation

## STEP 1



Remove parts from the box and identify them based on the drawings below.

Retirez les pièces de la boîte et identifiez-les en vous basant sur les schémas ci-dessous.

Top of the fixture

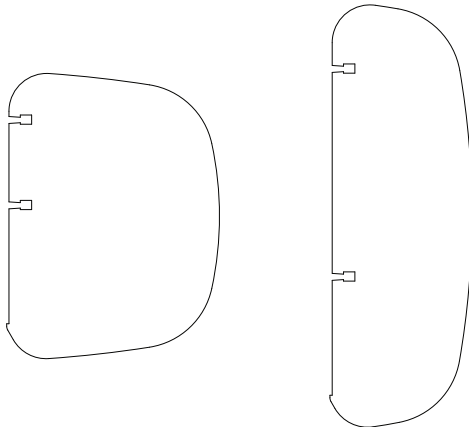

Bottom of the fixture



Top Disc  
(includes metal plate)

Bottom Disc

## STEP 2

Start by fixing 4 fins to both Top and Bottom Disc by gently pushing them into the slots on the discs. These fins should be fixed following a cross layout. Assemble a total of 16 out of the 20 fins leaving one of the quarter sections empty so that you can easily fix the Light source to the shade.

Commencez par fixer 4 ailettes aux disques supérieur et inférieur en les poussant doucement dans les fentes des disques. Ces ailerons doivent être fixés suivant une disposition en croix. Assemblez un total de 16 des 20 ailettes en laissant l'un des quarts de section vide afin de pouvoir fixer facilement la source lumineuse à l'abat-jour.

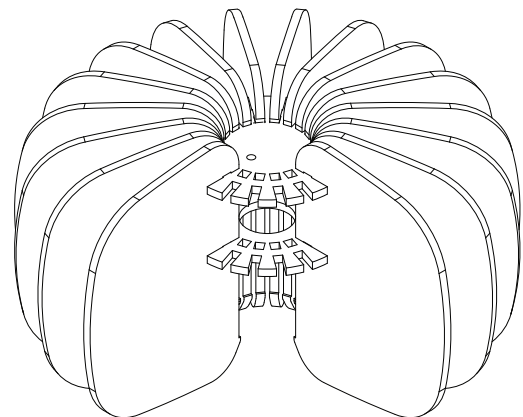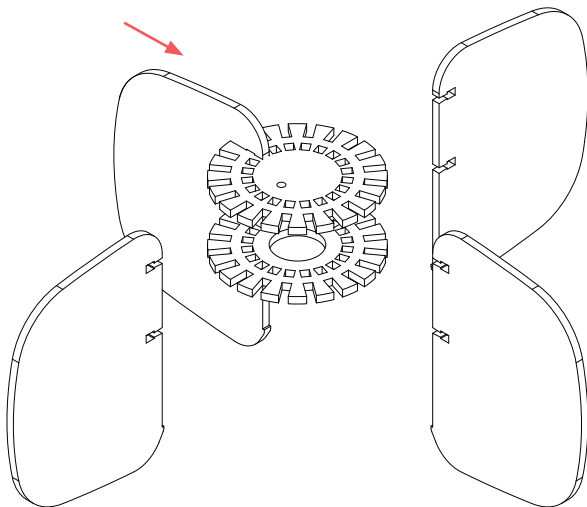

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. December 2022. LX-IL-v2.0



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM  
WWW.LUXXBOX.COM





ILLI



## INSTRUCTIONS

For Assembling and Installing | Pour l'assemblage et l'installation

## STEP 3

Insert Suspension Cable through the center hole on the Top Disc (including the metal plate). Do the same with the Power Cable through the bigger hole located at distance of 1"/25mm from the center of the disc. Slide Light Source in while pulling from both cables until it's fixed in place. A small clip-on mechanism has been added to the bottom of the fins to make sure the Light Source stays in place while it's not being suspended.


Insérez le câble de suspension dans le trou central du disque supérieur (y compris la plaque métallique). Faites de même avec le câble d'alimentation à travers le plus grand trou situé à une distance de 1" / 25 mm du centre du disque. Insérez la source de lumière tout en tirant sur les deux câbles jusqu'à ce qu'elle soit fixée en place. Un petit mécanisme à clip a été ajouté au bas des ailettes pour s'assurer que la source lumineuse reste en place lorsqu'elle n'est pas suspendue.

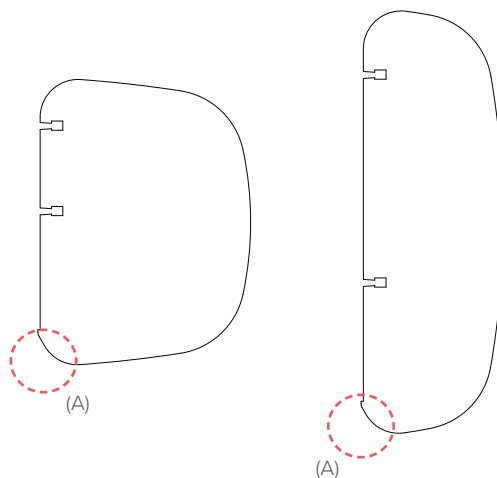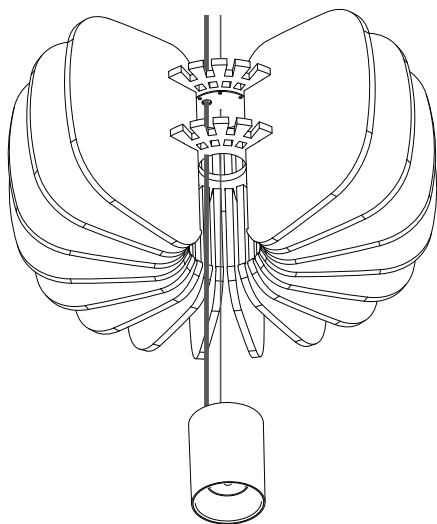

## STEP 4

Fix the rest of the fins in place.

Fixez le reste des ailerons en place.

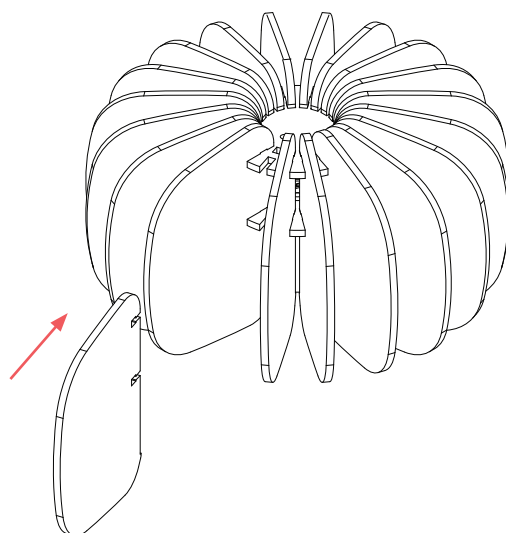

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. December 2022. LX-IL-v2.0



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM  
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM  
WWW.LUXBOX.COM

